




## Self Study Program 850103

# The 8-Speed Automatic Transmission 0C8 Design and Function

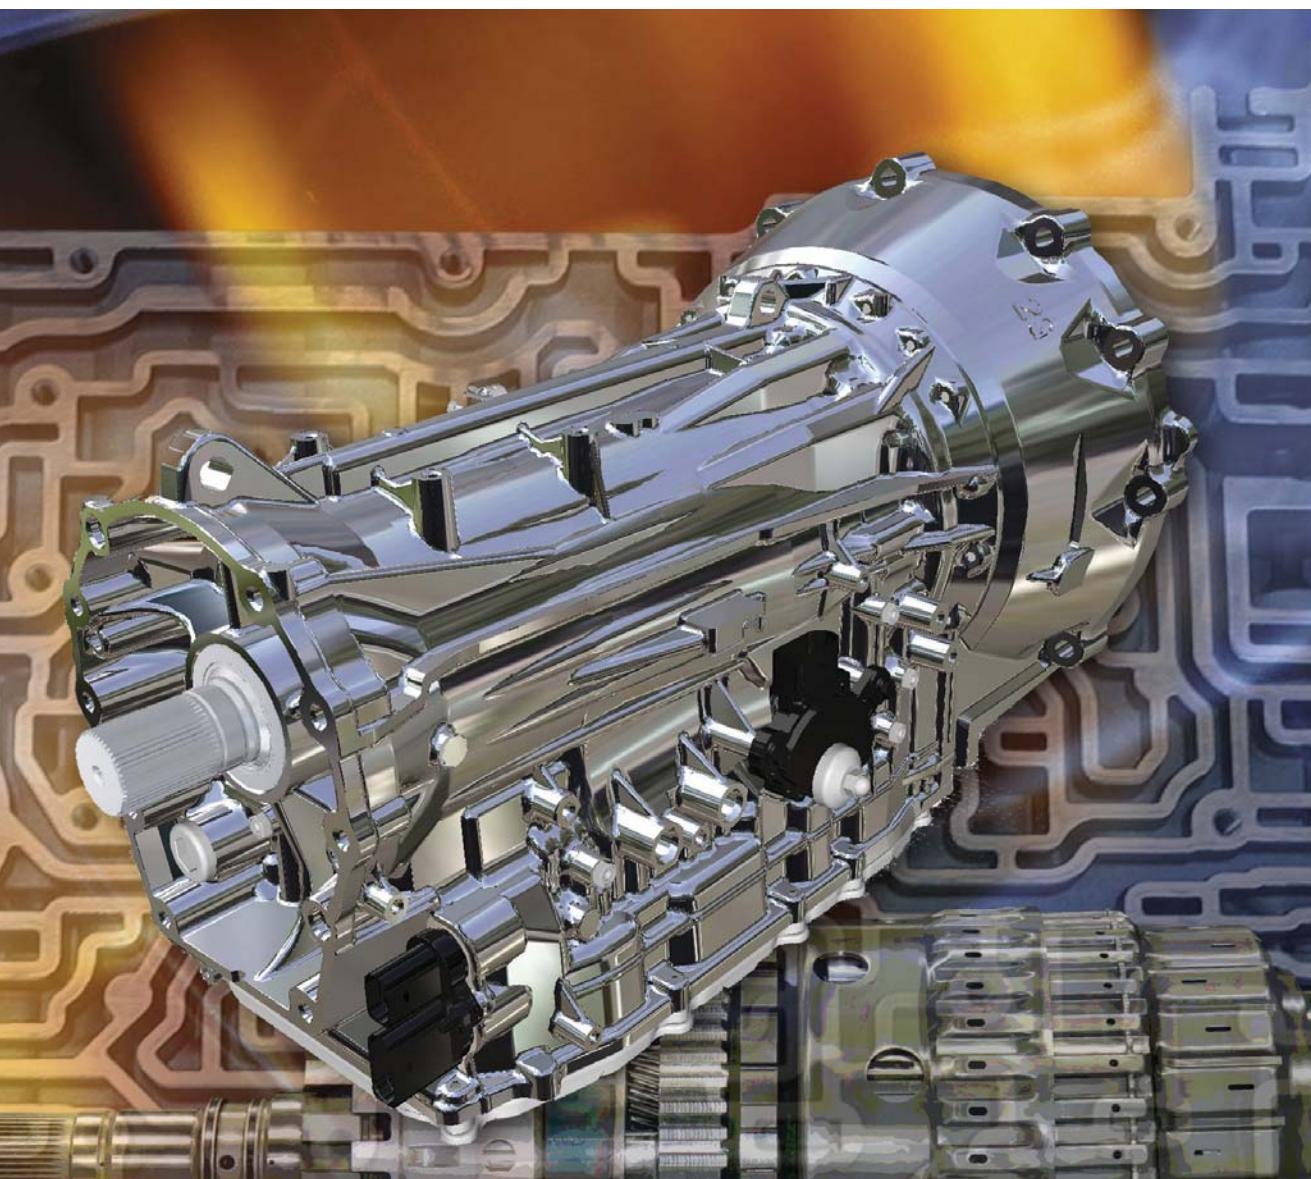

Volkswagen Group of America, Inc.  
Volkswagen Academy  
Printed in U.S.A.  
Printed 08/2010

Course Number 850103

©2010 Volkswagen Group of America, Inc.

All rights reserved. All information contained in this manual is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Volkswagen Group of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, nor may these materials be modified or reposted to other sites without the prior expressed written permission of the publisher.

All requests for permission to copy and redistribute information should be referred to Volkswagen Group of America, Inc.

Always check Technical Bulletins and the latest electronic repair information for information that may supersede any information included in this booklet.


Trademarks: All brand names and product names used in this manual are trade names, service marks, trademarks, or registered trademarks; and are the property of their respective owners.

# Contents

<b>Introduction . . . . .</b>	<b>1</b>
<b>Transmission Design . . . . .</b>	<b>3</b>
<b>Transmission Function . . . . .</b>	<b>17</b>
<b>Transmission Management System . . . . .</b>	<b>28</b>
<b>Electrical Components . . . . .</b>	<b>34</b>
<b>Functional Diagram . . . . .</b>	<b>38</b>
<b>Knowledge Assessment . . . . .</b>	<b>41</b>

This Self-Study Program provides information regarding the design and function of new models.  
This Self-Study Program is not a Repair Manual.

**This information will not be updated.**  
For maintenance and repair procedures, always refer to the latest electronic service information.



---


**Page intentionally left blank**

# Introduction

---

The 0C8 8-speed automatic transmission is based on the previous 09D automatic transmission. This transmission uses the same basic components and has added two more forward speeds, helping both performance and fuel consumption.

All 2011 Touareg vehicles will have the 0C8 8-speed automatic transmission.

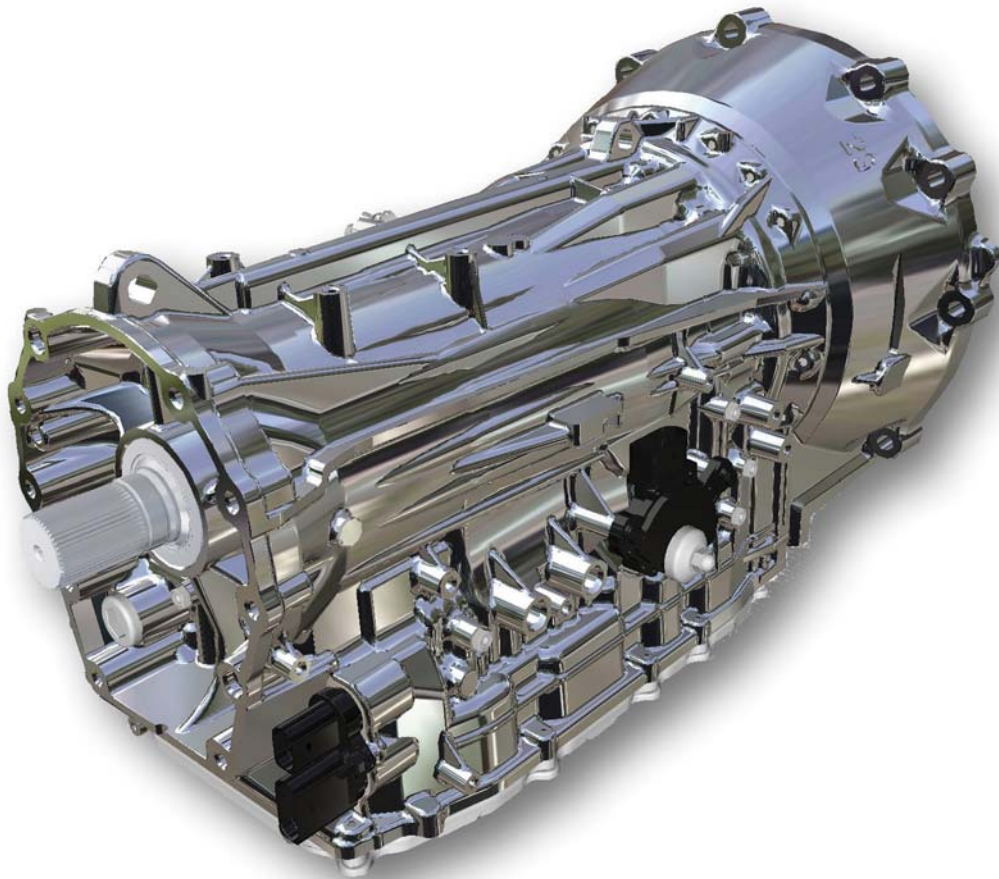

S466\_003

# Introduction

---

## Technical Data


<b>Developer/ Manufacturer</b>	AISIN AW CO. LTD Japan
<b>Designation</b>	<ul style="list-style-type: none"><li>• Automatic transmission 0C8</li></ul>
<b>Transmission Features</b>	<ul style="list-style-type: none"><li>• Electrohydraulically controlled 8-speed planetary transmission with a simple primary planetary gear set and a Ravigneaux planetary gear set</li><li>• Torque converter with slip-controlled torque converter lock-up clutch</li><li>• Designed for longitudinal installation in combination with a transfer case</li></ul>
<b>Control System</b>	<ul style="list-style-type: none"><li>• Hydraulic control unit (valve body) in the oil sump with external electronic control module</li><li>• Dynamic Shift Program DSP with separate sports program in "position S" and "Tiptronic" mode for manual gear changes</li><li>• Special feature: Starting off in 2nd gear is possible in Tiptronic mode</li></ul>
<b>Torque</b>	Depending on version, up to 737 lb/ft (1000 Nm)
<b>Service</b>	For fluid maintenance and intervals, see ElsaWeb
<b>Weight</b>	Depending on adaptation of the transmission to the engine, between 200 and 240 lb (91 and 108 kg)
<b>Speed</b>	Depending on engine, the top speed can be achieved in 6th, 7th or 8th gear



# Transmission Design

The 8-speed automatic transmission consists of :


- The torque converter with lock-up clutch
- The ATF pump
- The valve body
- The Lepellitier planetary transmission configuration
- The transmission housing
- Auxiliary hydraulic pump for transmission oil
- ATF preheater

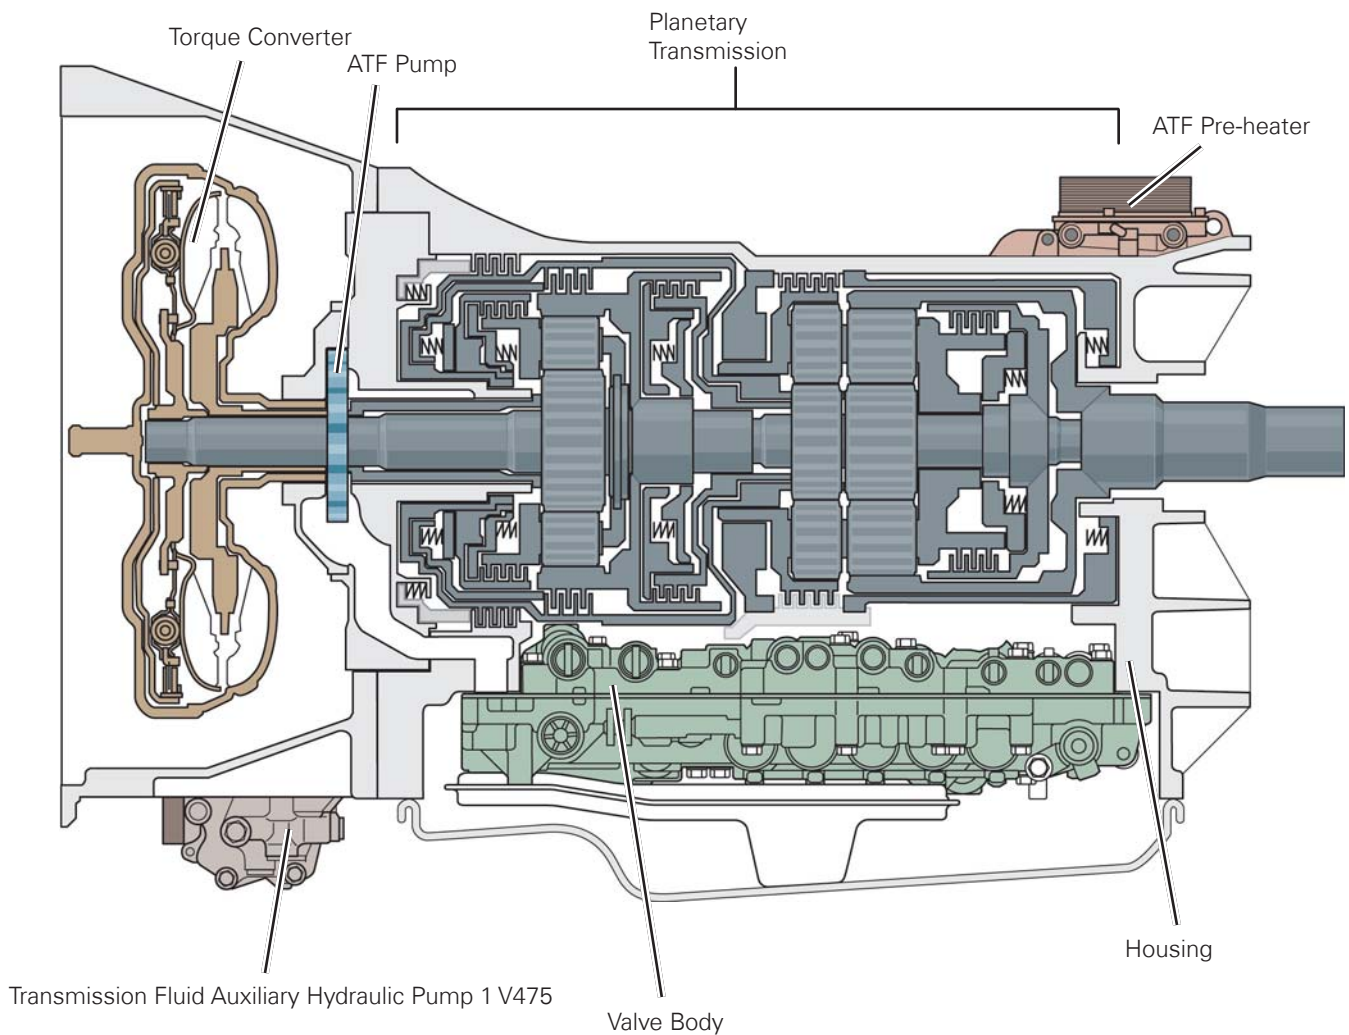

S466\_006

# Transmission Design


## The Torque Converter

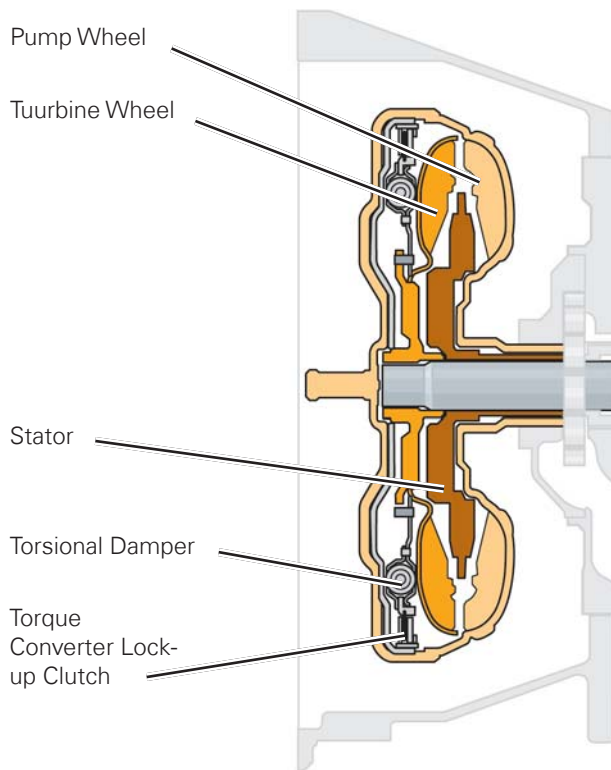

S466\_073

The hydro-mechanical torque converter is a fluid clutch. It is used both to transfer and multiply torque from the engine. It consists of a turbine, pump, stator and lock-up clutch.

Torsional dampers are installed in all torque converters. This allows the engine's torsional vibrations to be minimized.

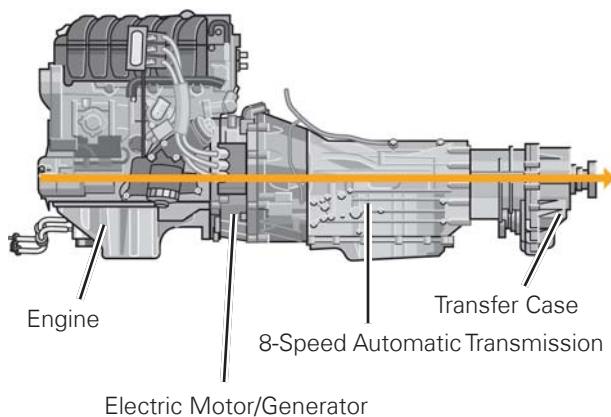

S466\_042

In hybrid vehicles with combined electric motor and combustion engine, the combustion engine drives the torque converter via a shaft. This shaft runs through the middle of electric motor (electric motor/generator). If the electric motor is used to drive the hybrid vehicle, the torque converter is driven directly by the electric motor.


Different torque converters will be used depending on the engine and drive characteristics.



# Transmission Design

## The Connection between the Engine to the Torque Converter

The torque converter is connected to the different engines via three lugs. Depending on the engine, 3 or 6 bolts are required to connect the lugs to the engine.



3.6L V6 FSI Engine

S466\_215



3.0L V6 TDI

S466\_214



3.0L V6 FSI

S466\_216


## The Torque Converter Lock-up Clutch

The torque converter lock-up clutch is a hydraulic multi-plate clutch. It locks the torque converter's pump and turbine to eliminate slip.

Depending on the vehicle operating status, this can be carried out at any time at engine speeds of over 1000 rpm.

Torque Converter Lock-up Clutch

Torque Converter

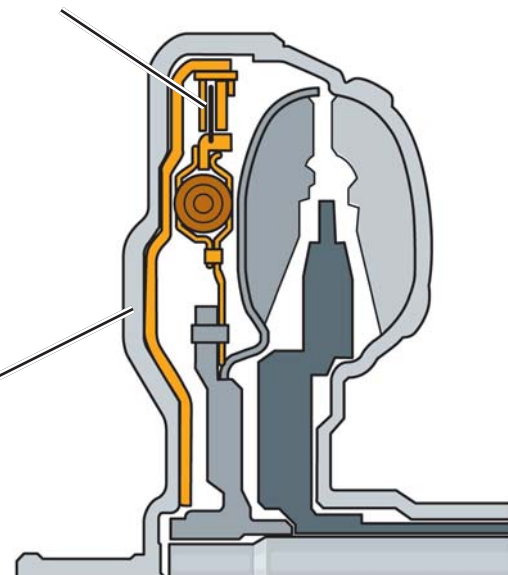


S466\_072

# Transmission Design

## The Oil Supply

Depending on drivetrain, the 8-speed automatic transmission is equipped with the following oil pressure pumps:

- Combustion Engine: The ATF pump inside of the transmission
- Hybrid Drivetrain: The ATF pump inside of the transmission and the Transmission Fluid Auxiliary Hydraulic Pump 1 V475

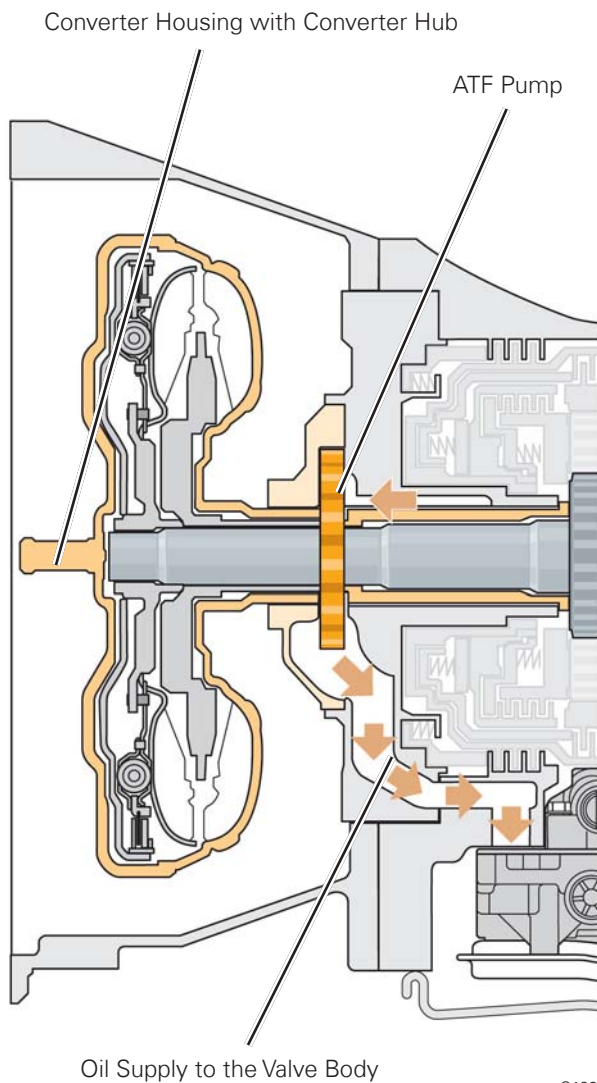

## The ATF Pump

In vehicles with combustion engine, the mechanical ATF pump (Automatic Transmission Fluid) is responsible for supplying the transmission with oil. It draws the ATF out of the oil pan, builds up the oil pressure and supplies the valve body with the hydraulic oil required for changing gears.

The oil pump is a crescent pump (duocentric oil pump). It is driven directly by the engine via the converter housing and the converter hub. When driven, the ATF pump's pinion drive plates engage in two grooves on the converter hub.

In hybrid vehicles, this pump is driven by either the combustion engine and/or the electric motor/generator.

# Transmission Design

## Transmission Fluid Auxiliary Hydraulic Pump 1 V475

Hybrid vehicles do not always run the combustion engine. However, it is still necessary for the automatic transmission to have oil pressure for normal operation. The Transmission Fluid Auxiliary Hydraulic Pump 1 V475 is responsible for supplying oil pressure to the transmission when the engine is not running and the vehicle is stationary. It is located under the bell housing.

### Function

The V475 is an electric motor which drives the hydraulic pump. The electric motor is a brushless DC motor that is made up of a stator and a rotor.


The pump is a crescent pump (duocentric pump) that draws the ATF fluid out of the oil pan to pressurize and supply to the rest of the transmission. The oil enters the pump through a one-way check valve

The one-way check valve in the V475 prevents the oil pumped by the mechanical ATF pump from flowing back into the oil pan.

Oil Temperature Sensor 2 G664 is located inside of the auxiliary hydraulic pump. This provides the Transmission Control Module J217 with the operating temperature of the pump.


### Effect in the event of failure

Based on the rotational speed of the DC motor, the position sensors detect whether a malfunction is present. The malfunction is reported to the transmission control module. J217 tells the ECM to start the mechanical ATF pump via the combustion engine or the electric motor.

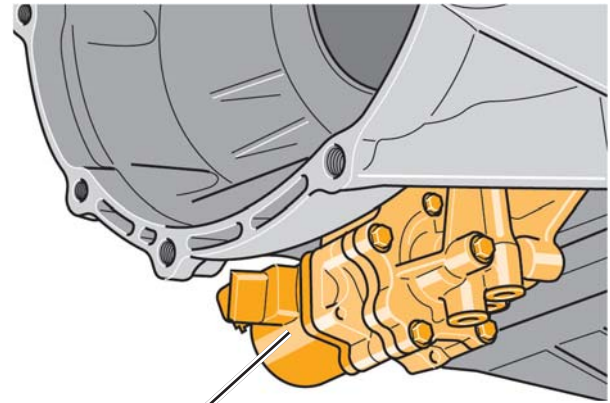

Auxiliary Hydraulic Pump


s466\_046

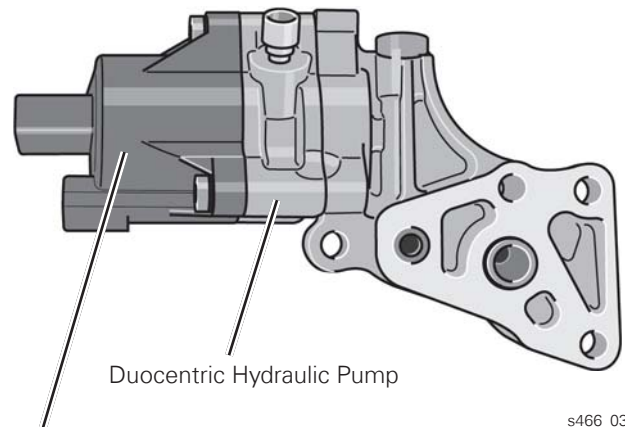

Duocentric Hydraulic Pump

Brushless Electric Motor

s466\_030

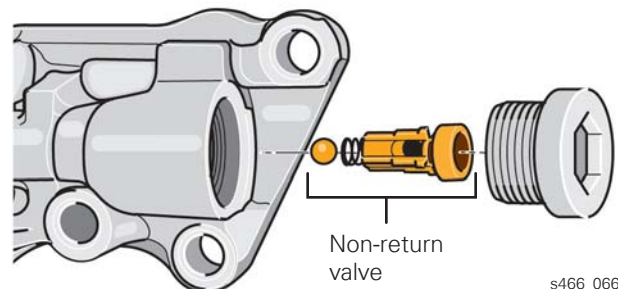


Non-return valve

s466\_066

# Transmission Design

## The Planetary Transmission

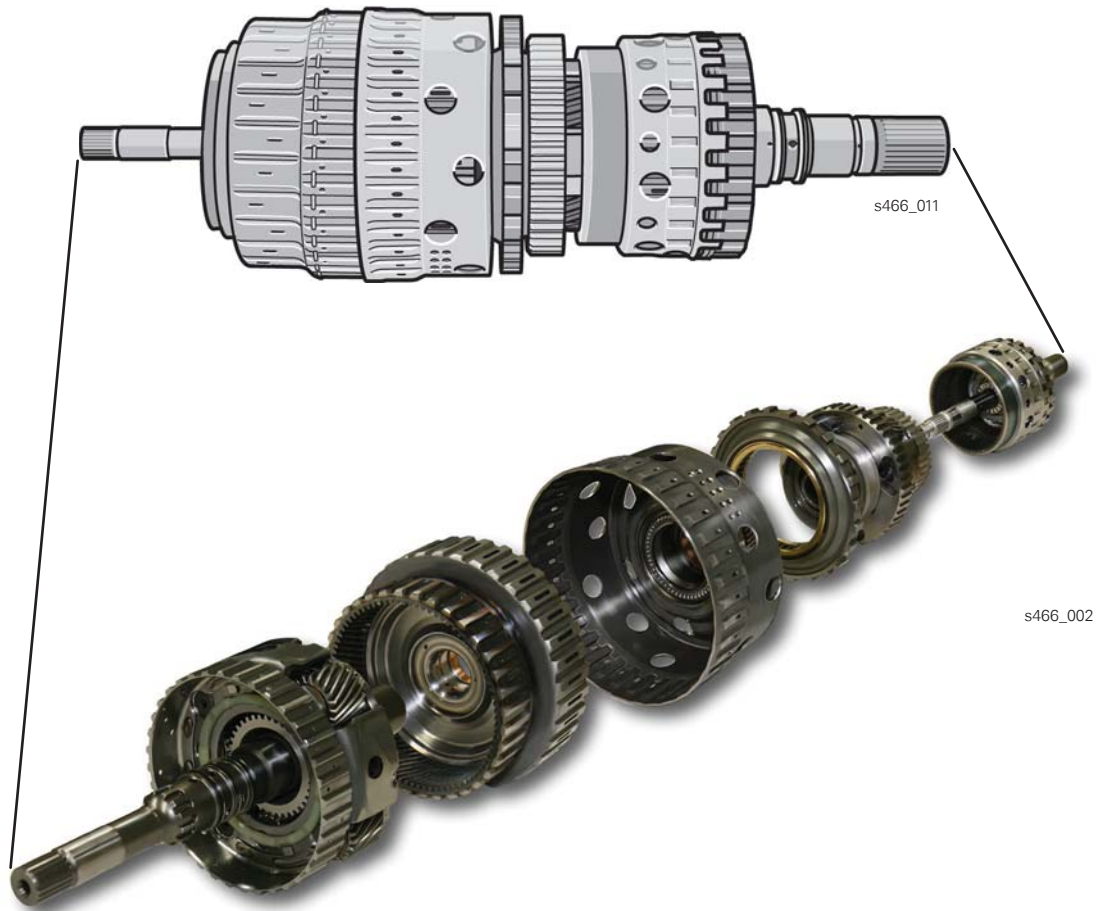

### Design

The Lepelletier planetary gear set concept is based on a single planetary gear set (primary planetary transmission) and a downstream, double planetary gear set (Ravigneaux) with freewheeling capability.

The special feature of the Lepelletier planetary transmission is the fact that the double planetary gear set's sun gears and planet carrier are driven at different rotational speeds. These different input speeds create a large number of possible gear ratios.

In this transmission, the double planetary gear set's sun gears can be driven by the output speeds of the planet carrier or the annulus (sun gear) of the single planetary gear set. At the same time, the double planetary gear set's planet carrier runs at the transmission input speed. This configuration enables the use of two additional forward gears.

Four multi-plate clutches, two multi-disc brakes and the freewheel are used to operate the eight forward gears and one reverse gear.


## The Single Planetary Gear Set

The single planetary gear set is located in front of the double planetary gear set.

The single planetary gear set consists of:


- The stationary sun gear S1
- The planetary gears P1
- The planet carrier PT1
- The annulus H1
- The multi-plate clutches K1, K3 and K4
- The multi-disc brake B1

Either four or five planetary gear pairs are installed depending on the engine. These gears make the connection to the S1 and the H1. The engine torque is transmitted into the single planetary gear set via the transmission input shaft.

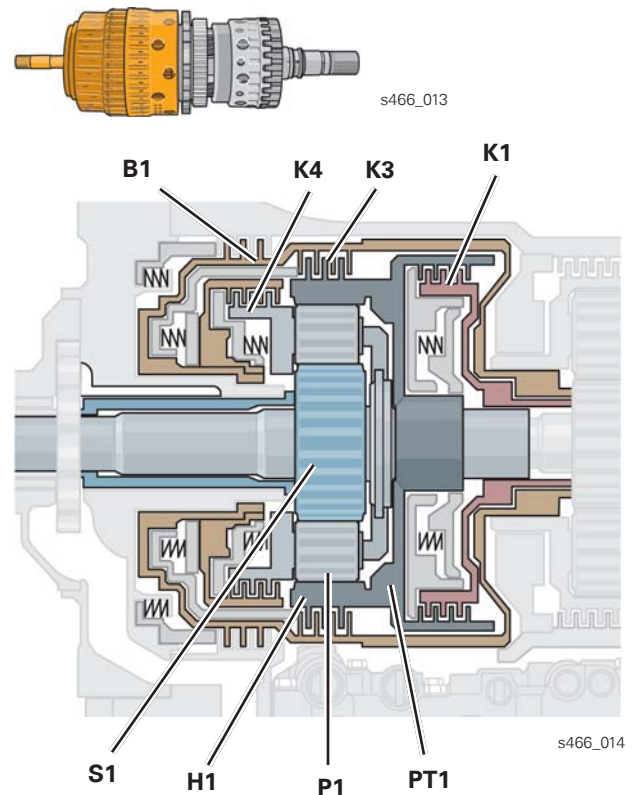

## The Sun Gear S1


This is firmly joined to the mechanical ATF pump via a splined connection. As a result of this joint, the S1 is unable to rotate.

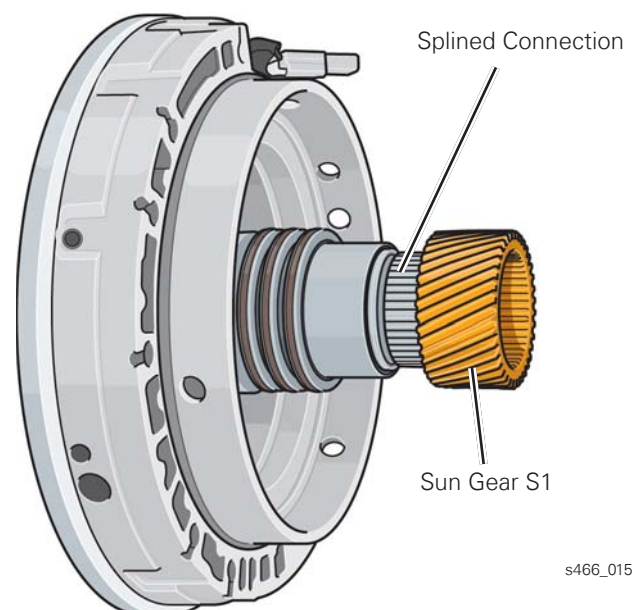



# Transmission Design

## The Double Planetary Gear Set


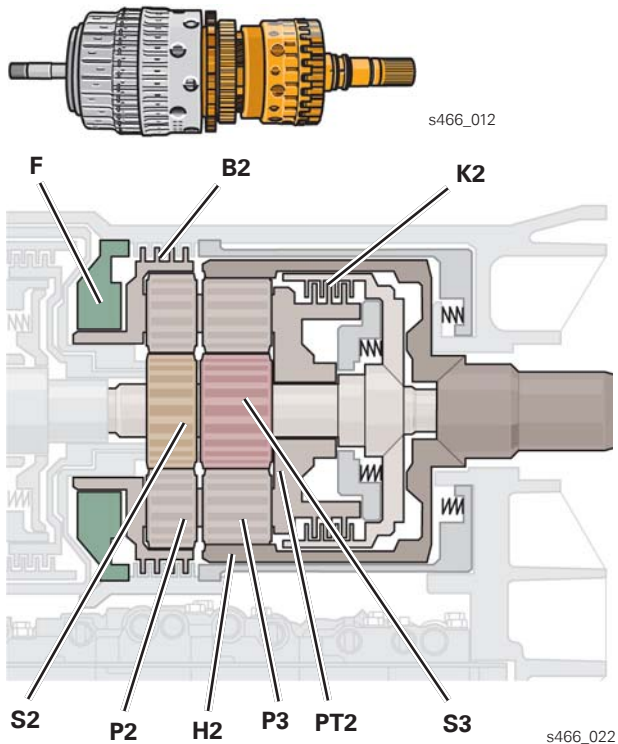


The double planetary gear set is attached to the single planetary gear set.

The engine torque is transmitted into the double planetary gear set via two routes:

The S2 and S3 transfer the torque via the single planetary gear set via K2 to PT2. The output to the transfer case goes from the H2 via the transmission output shaft. The double planetary gear set consists of:

- The sun gears S2 and S3
- The planetary gear sets P2 and P3
- The planet carrier PT2
- The annulus H2
- The multi-plate clutch K2
- The multi-disc brake B2 and
- The freewheel F

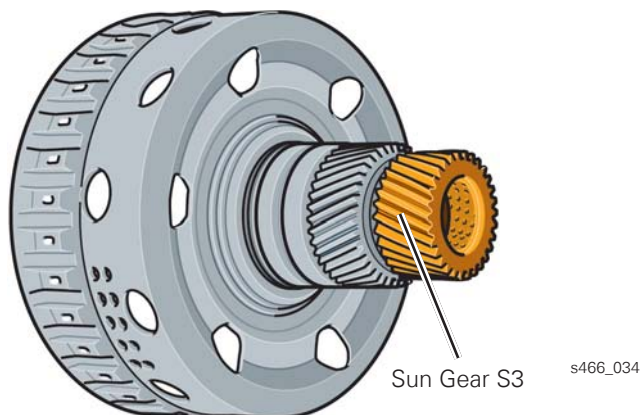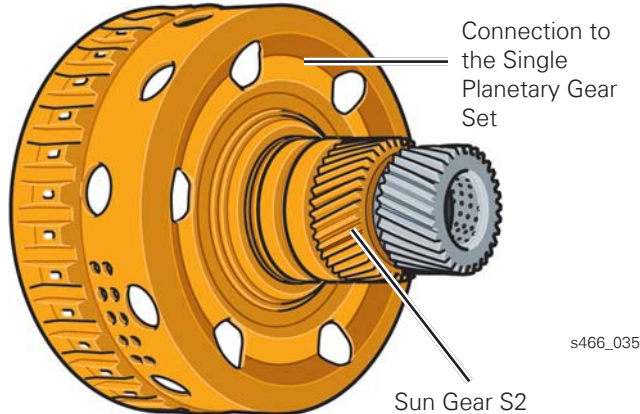

## The Sun Gears S2 and S3

Both S2 and S3 can be rotated independently of each other. The axle of S3 runs through S2. Both sun gears can be driven at different rotational speeds.



# Transmission Design




## The Planetary Gears P2 and P3

Planetary gears P2 and outer planetary gears P3 are fitted together on one single shaft.


The torque from sun gear S2 is transferred to P2 and to the P3. Only the P3 are joined to annulus H2. These transfer the torque from S2 to H2.

The torque from S3 to the H2 is first transmitted to the P3. The P3 transfer the torque to the P2 and to the H2.

Depending on the engine, three or four P2 plus P3 planetary gears are used.

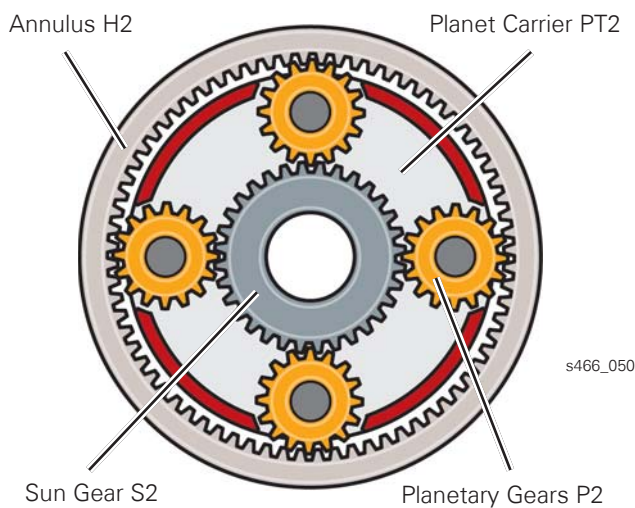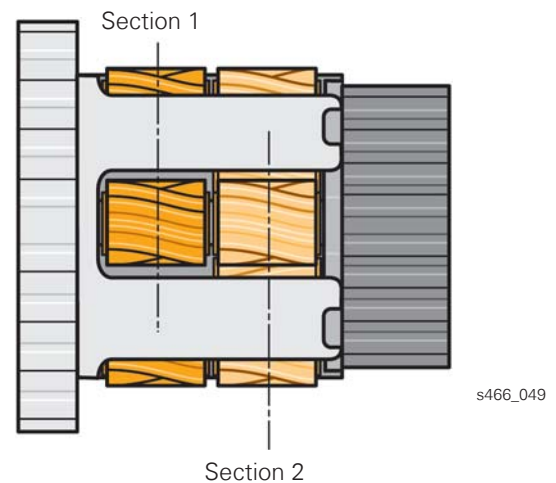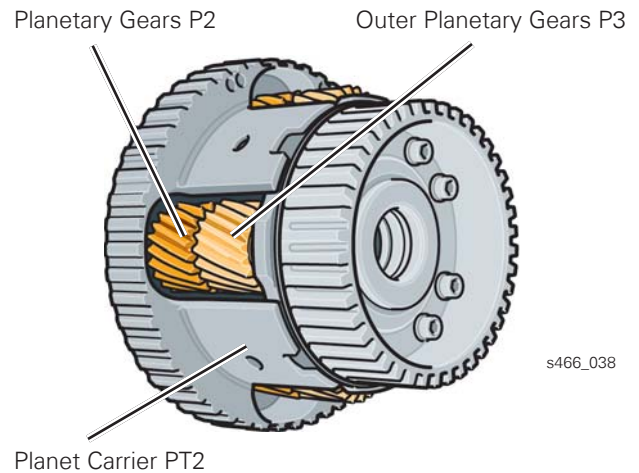


**Section 1**

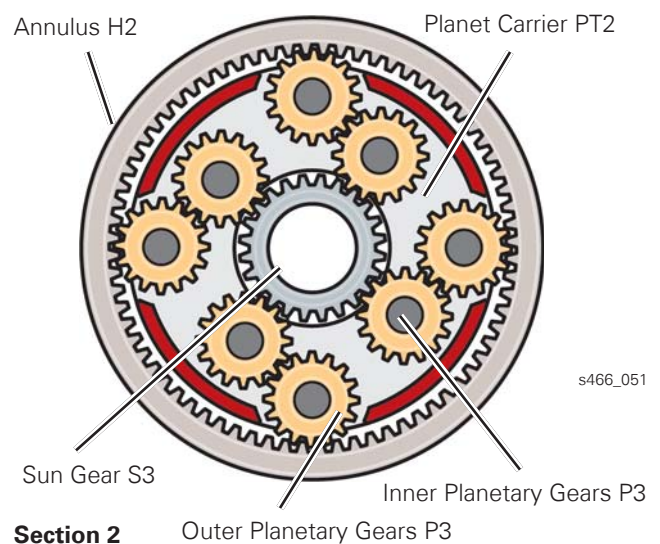

**Section 2**

# Transmission Design

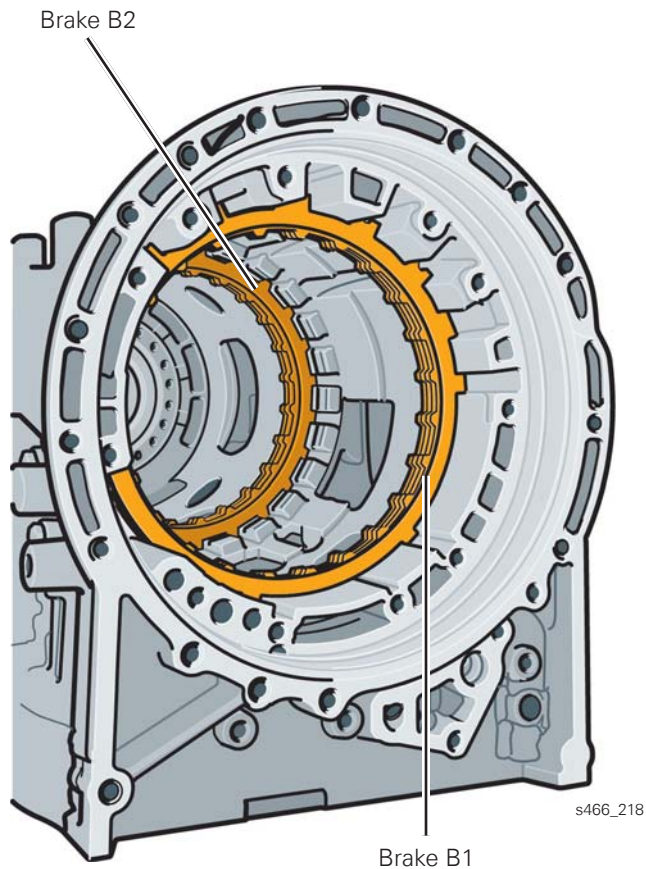

**Transmission Housing with the Discs of Brakes B1 and B2**

## Brake B1

Brake B1 is keyed to the transmission housing. If the Automatic Transmission Pressure Regulating Valve N216 is supplied with current, the brake's discs are pressed together with hydraulic oil pressure. Under these conditions, the sun gear S2 is held.

## Brake B2

B2 is keyed to the transmission housing. It is actuated via the valve body. No pressure regulating valve is required to control B2.

When closed, it holds the planet carrier PT2.




The engine type determines the number of discs in the brakes.  
The number of discs can vary between 4 and 7 per brake.

# Transmission Design

## Clutches K1, K2, K3 and K4

The clutches are opened or closed via the solenoid valves within the valve body. The following list shows the function that each clutch performs in its closed position:

1. K1 connects annulus H1 to sun gear S3.
2. K2 connects the turbine shaft to planet carrier PT2.
3. K3 connects annulus H1 to sun gear S2.
4. K4 connects planet carrier PT1 to sun gear S2.

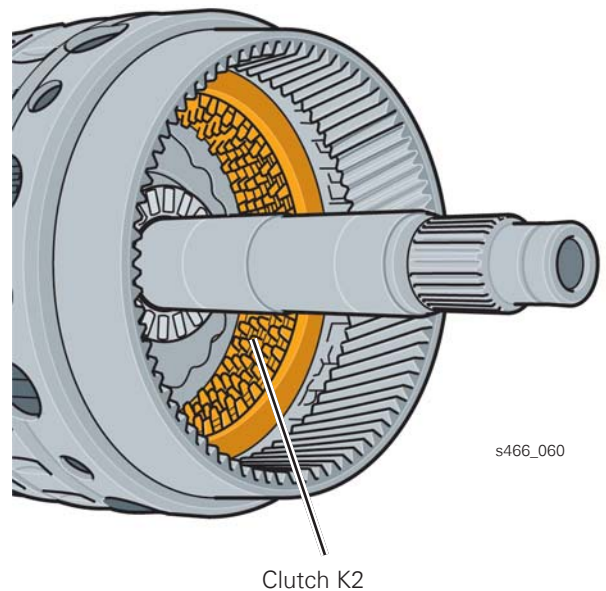

# Transmission Design

## The Valve Body

The valve body is mounted to the bottom of the transmission housing. The clutches and brakes are controlled by the valve body using sliding valves.


The slide valves are controlled by solenoid valves which are actuated by the Transmission Control Module J217.

In addition to the clutches and brakes, the valve body controls the torque converter clutch and the various pressures throughout the entire transmission (ex. main pressure, control pressure, converter pressure, lubrication pressure, etc.).

The valve body is responsible for the entire oil supply.

The valve body contains the following components:

- The mechanically actuated spool valve
- The hydraulic selector valves
- Two electrically controlled solenoid valves (3/2-way directional control valves)
- Seven electric pressure regulating valves (modulation valves) and
- The transmission oil temperature sensor

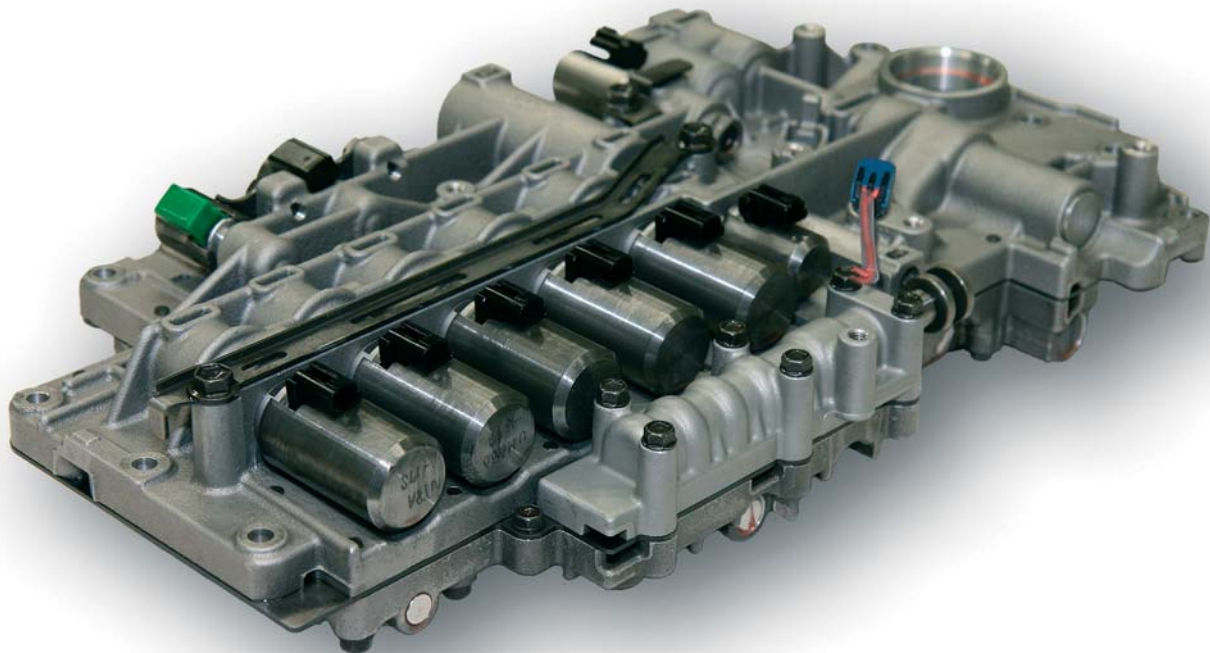


s466\_005



## The Valves


The valve body contains three different types of solenoid valves.

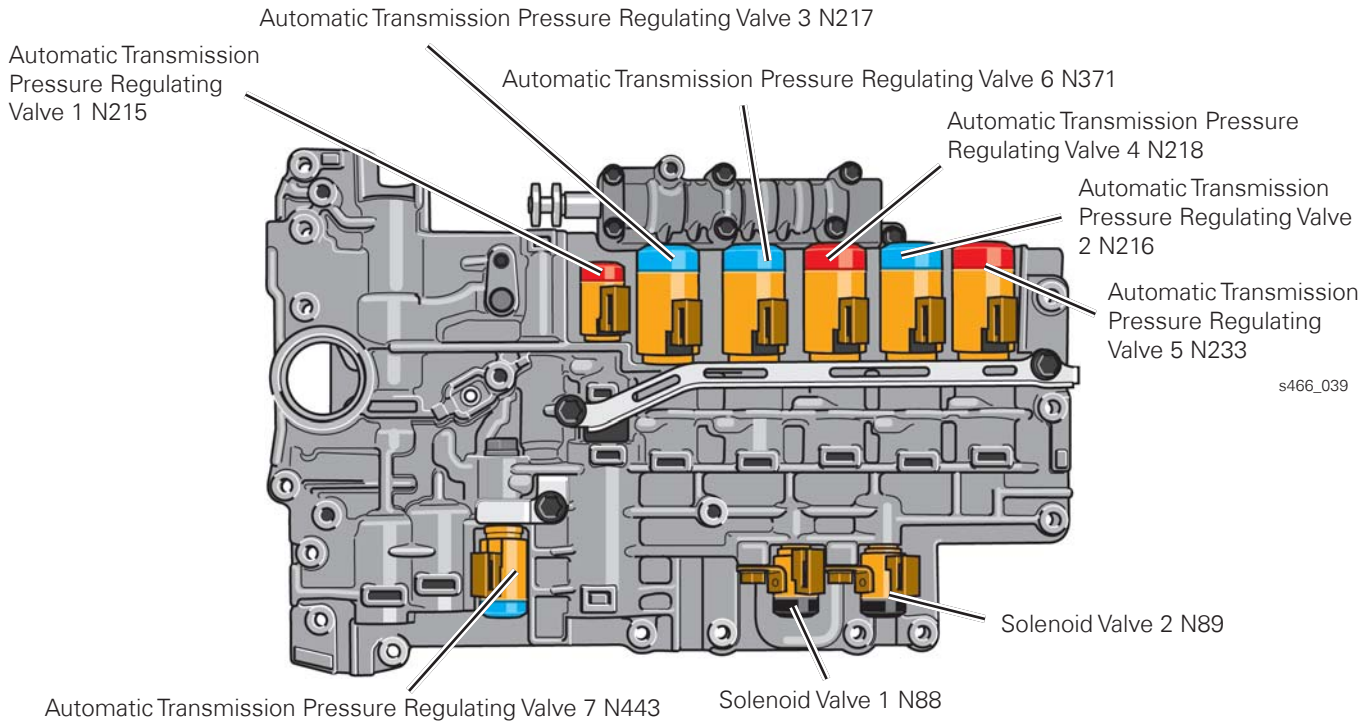

- Pressure regulating valves with ascending characteristic curve
- Pressure regulating valves with descending characteristic curve
- Selector valves (ON/OFF valves)

### Pressure Regulating Valve with Ascending Characteristic Curve

The more the pressure regulating valve is supplied with current, the higher the hydraulic pressure. If the pressure regulating valve is not supplied with current, no hydraulic pressure is present.




Pressure regulating valves with ascending characteristic curve (N216, N217, N371 and N443)

s466\_040

### Pressure Regulating Valve with Descending Characteristic Curve

The more the pressure regulating valve is supplied with current, the lower the hydraulic pressure. If the pressure regulating valve is not supplied with current, full hydraulic pressure is present.



Pressure regulating valves with descending characteristic curve (N215, N218 and N233)

s466\_041

# Transmission Design

Functions of each of the solenoid valves:


Valve	Function when current applied	Direct access to	Gear Responsibility
Automatic Transmission Pressure Regulating Valve 1 N215	Regulates the ATF pressure and directs it either directly to clutches K2 and K3 or via solenoid valves N217, N371 and N216 to clutches K1 and K4 and to brake B1	Main pressure	R. 1st to 8th
Automatic Transmission Pressure Regulating Valve 2 N216	Supplies the ATF pressure to B1 brake, closing the brake	B1 Brake	2nd and 8th
Automatic Transmission Pressure Regulating Valve 3 N217	Supplies the ATF pressure to the plates of the K1 clutch, closing the clutch	K1 Clutch	1st to 5th
Automatic Transmission Pressure Regulating Valve 4 N218	Relieves ATF pressure on the K2 clutch, opening the clutch	K2 Clutch	1st, engine brake 5th to 8th
Automatic Transmission Pressure Regulating Valve 5 N233	Relieves ATF pressure on the K3 clutch, opening the clutch	K3 Clutch	R, 3rd , 7th
Automatic Transmission Pressure Regulating Valve 6 N371	Supplies the ATF pressure to the K4 clutch, closing the clutch	K4 Clutch	4th and 6th
Automatic Transmission Pressure Regulating Valve 7 N443	Supplies ATF pressure for the torque converter lock-up clutch		
Solenoid Valve 1 N88	Supports pressure reduction in clutches K2 and K3		
Solenoid Valve 2 N89	Only supplied with current in reverse gear when speed is > 7 km/h or 1st gear is engaged in Tiptronic. Prevents pressure reduction in clutches K2 and K3. Both valves operate alternately.		



# Transmission Function

## The Flow of Power

This is an extremely simplified diagram of the transmission. The torque paths of the individual gears will be explained in following pages. The valve body illustration shows which solenoid valves are actuated for each gear.

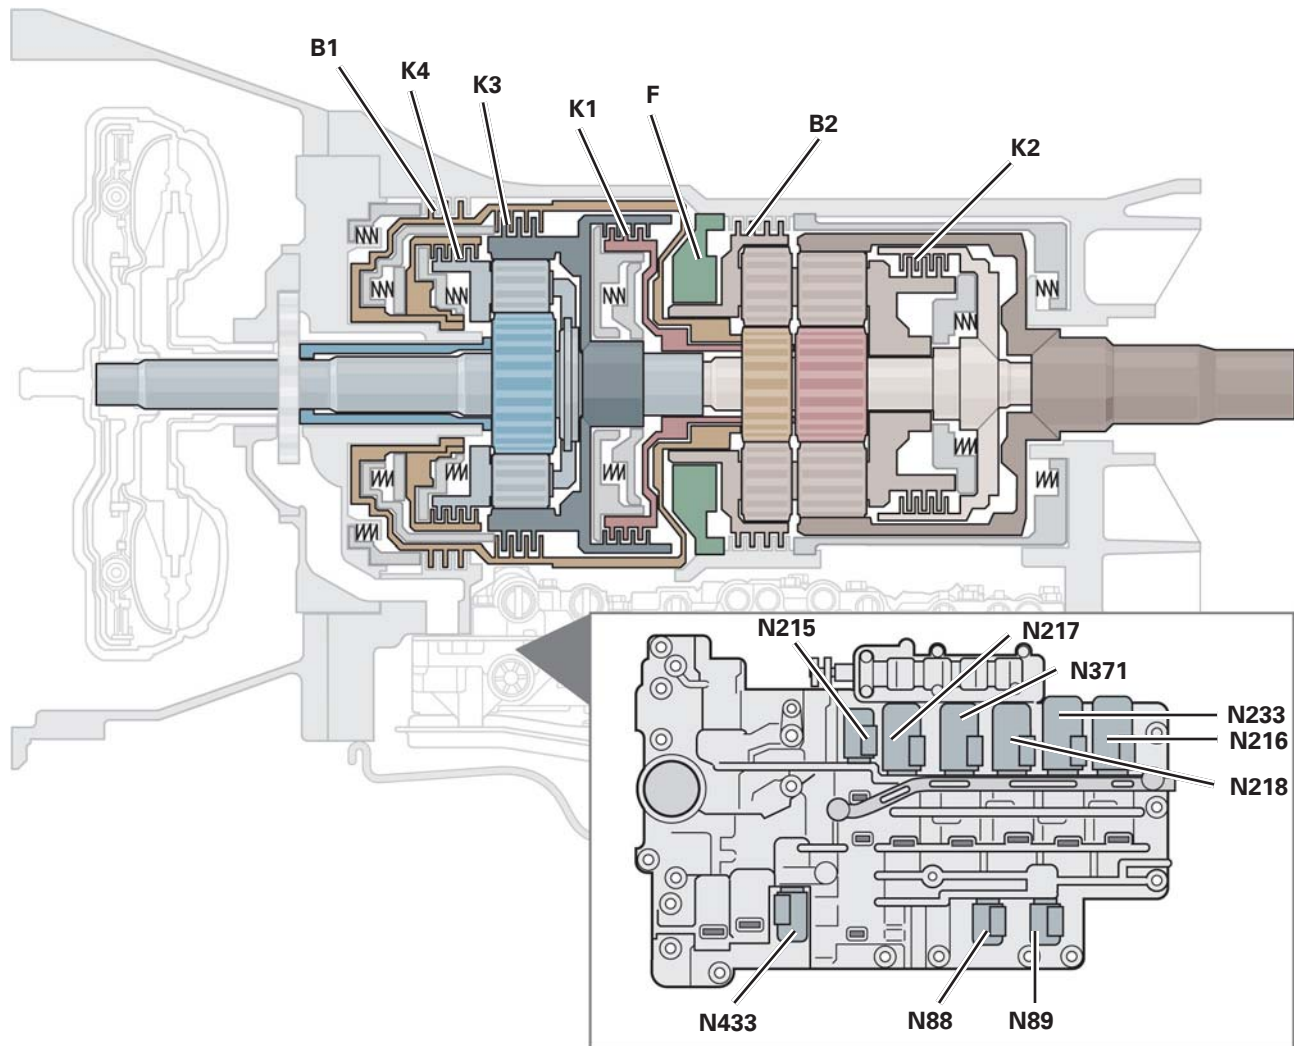

s466\_017

### Legend

N88 - Solenoid Valve 1

N89 - Solenoid Valve 2

N215 - Automatic Transmission Pressure Regulating Valve 1

N216 - Automatic Transmission Pressure Regulating Valve 2

N217 - Automatic Transmission Pressure Regulating Valve 3

N218 - Automatic Transmission Pressure Regulating Valve 4

N233 - Automatic Transmission Pressure Regulating Valve 5

N371 - Automatic Transmission Pressure Regulating Valve 6

N443 - Automatic Transmission Pressure Regulating Valve 7

K1 - Clutch 1

K2 - Clutch 2

K3 - Clutch 3

K4 - Clutch 4


B1 - Brake 1

B2 - Brake 2

F - Freewheel

# Transmission Function

## 1st Gear

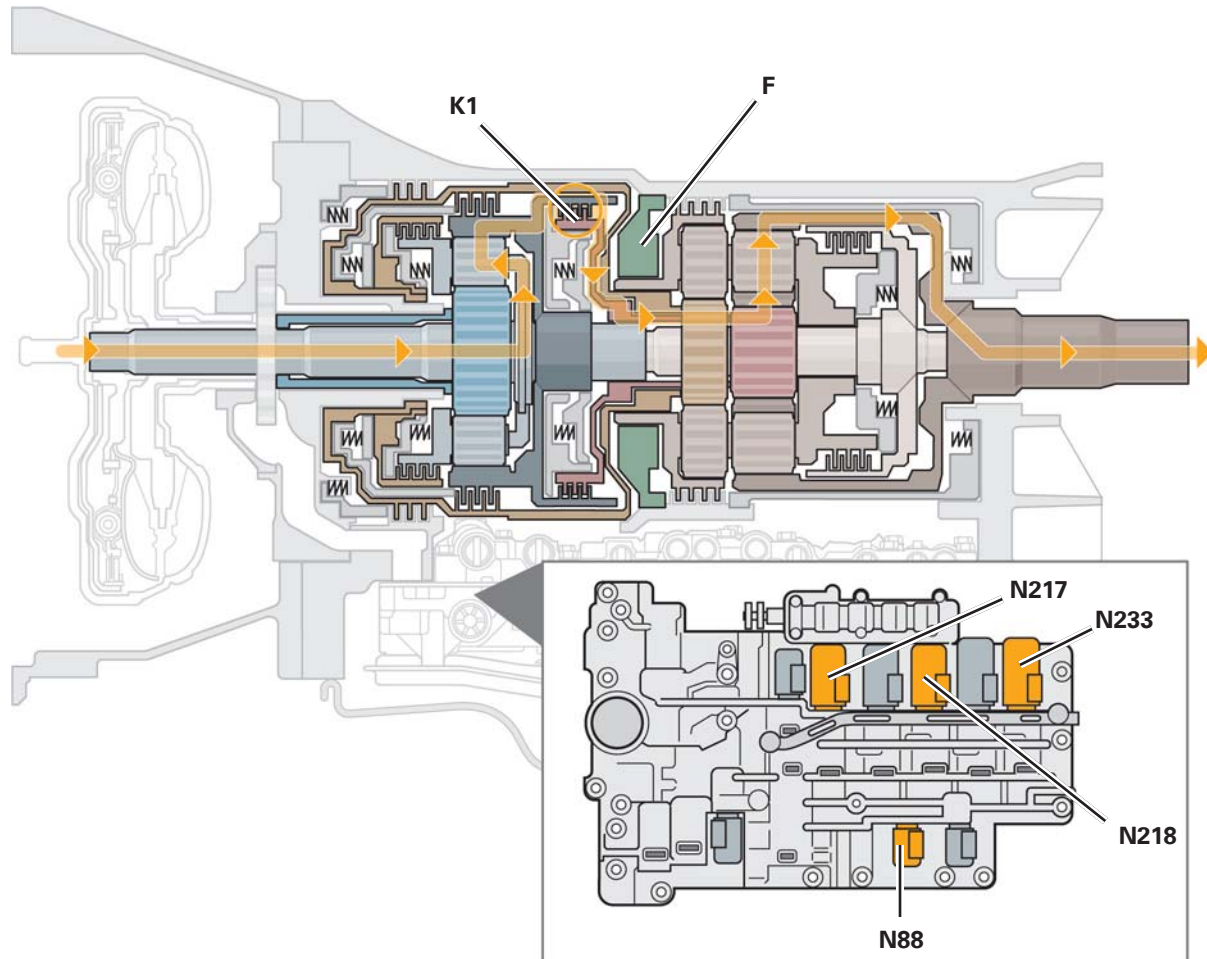

s466\_016


## K1 Clutch and Freewheel F

The turbine shaft drives the single planetary gear set's planet carrier PT1. The PT1 drives the planetary gears P1, which roll and are supported on stationary sun gear S1. Annulus H1 is driven.

The K1 connects H1 to sun gear S3 and transfers the torque into the double planetary gear set. The freewheel blocks planet carrier PT2. From the S3, the torque is transferred to the inner planetary gears P3 and to the outer planetary gears P3. Supported by PT2, the torque is transferred to annulus H2. The H2 is connected to the transmission output shaft.

# Transmission Function

## 1st Gear (Tiptronic)

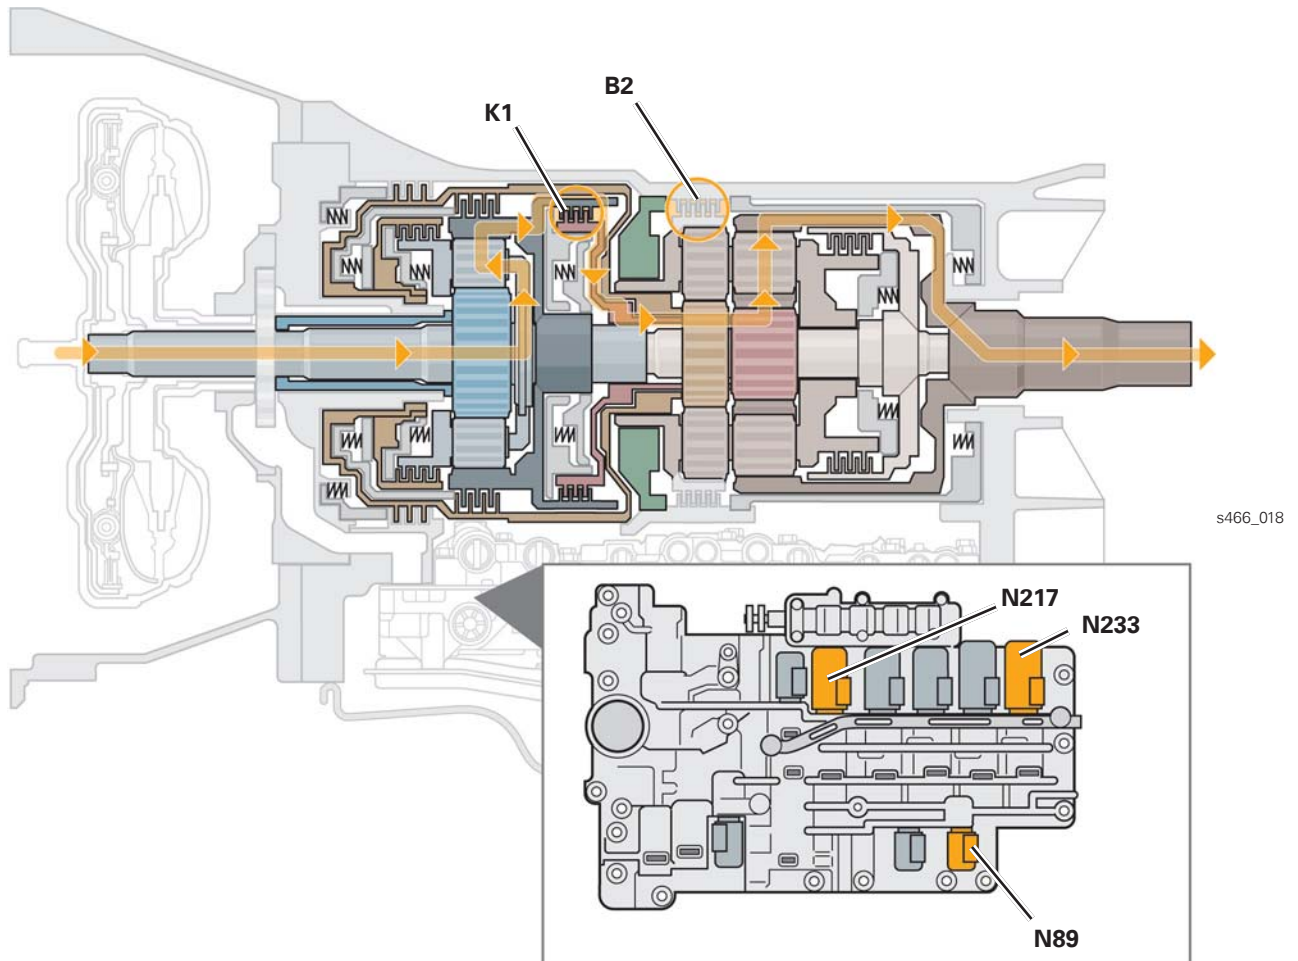

### K1 Clutch and B2 Brake


The driver may request the engine braking in 1st gear. This can be selected in Tiptronic mode. The torque path is the same as for 1st gear.

Use of the engine braking effect in 1st gear can only be enabled by closing B2.

Like the freewheel F, the B2 locks the planetary carrier PT2. In contrast to the F, however, B2 holds planet carrier PT2 in both rotational directions. This is necessary Reverse and for engine braking in 1st gear.

# Transmission Function

## 2nd Gear

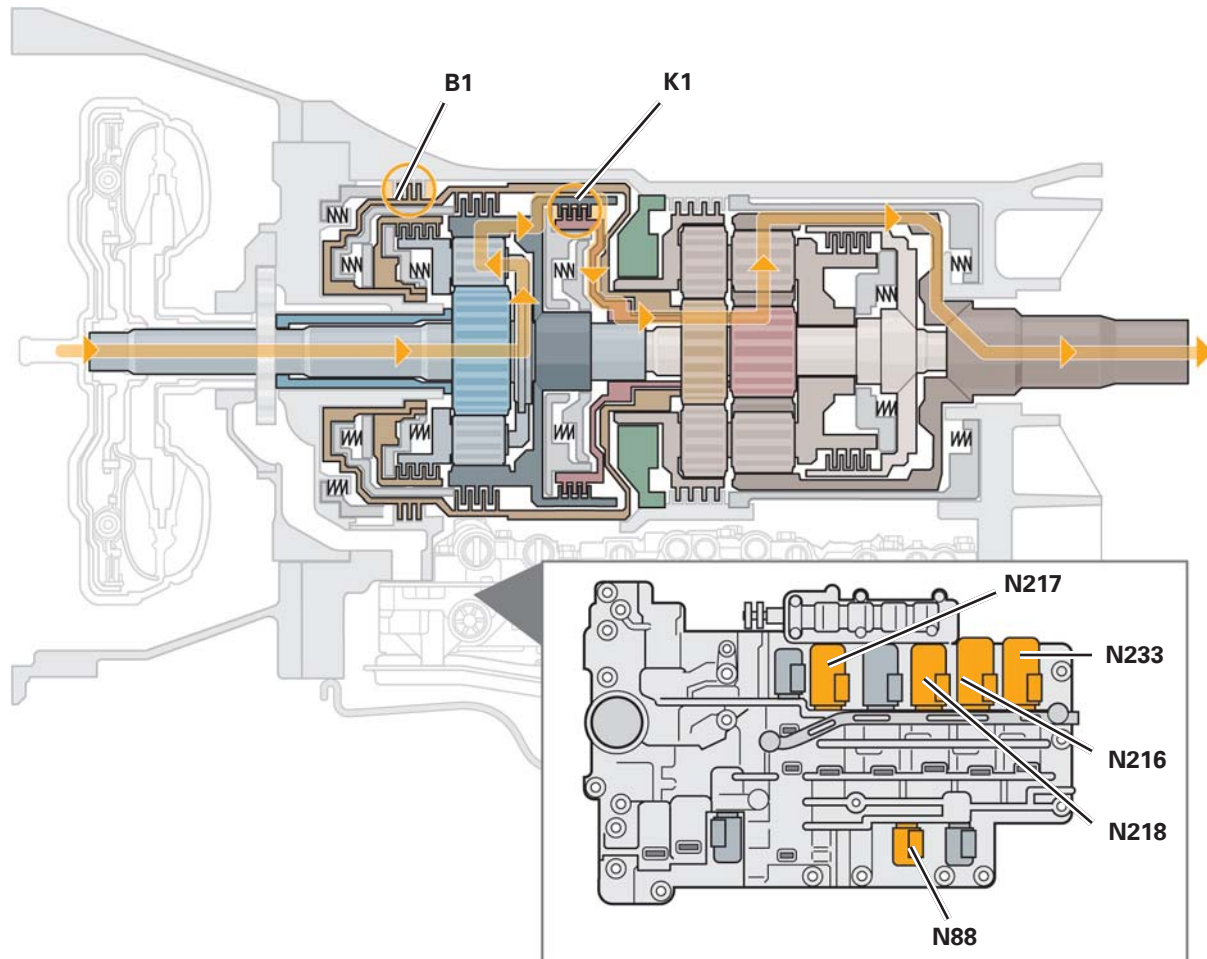

s466\_019


### K1 Clutch and B1 Brake

The turbine shaft drives the single planetary gear set's planet carrier PT1. PT1 drives the planetary gears P1, which roll and are supported on stationary S1 sun gear. This causes H1 annulus to be driven.

The K1 clutch connects the H1 to the S3 sun gear, transferring torque into the double planetary gear set. The B1 brake locks the S2 sun gear. The S3 transfers torque to the P3 inner planetary gears and from there to the P3 outer planetary gears. The P2 planetary gears roll on S2 and, together with the P3 outer planetary gears, drive H2.

# Transmission Function

## 3rd Gear

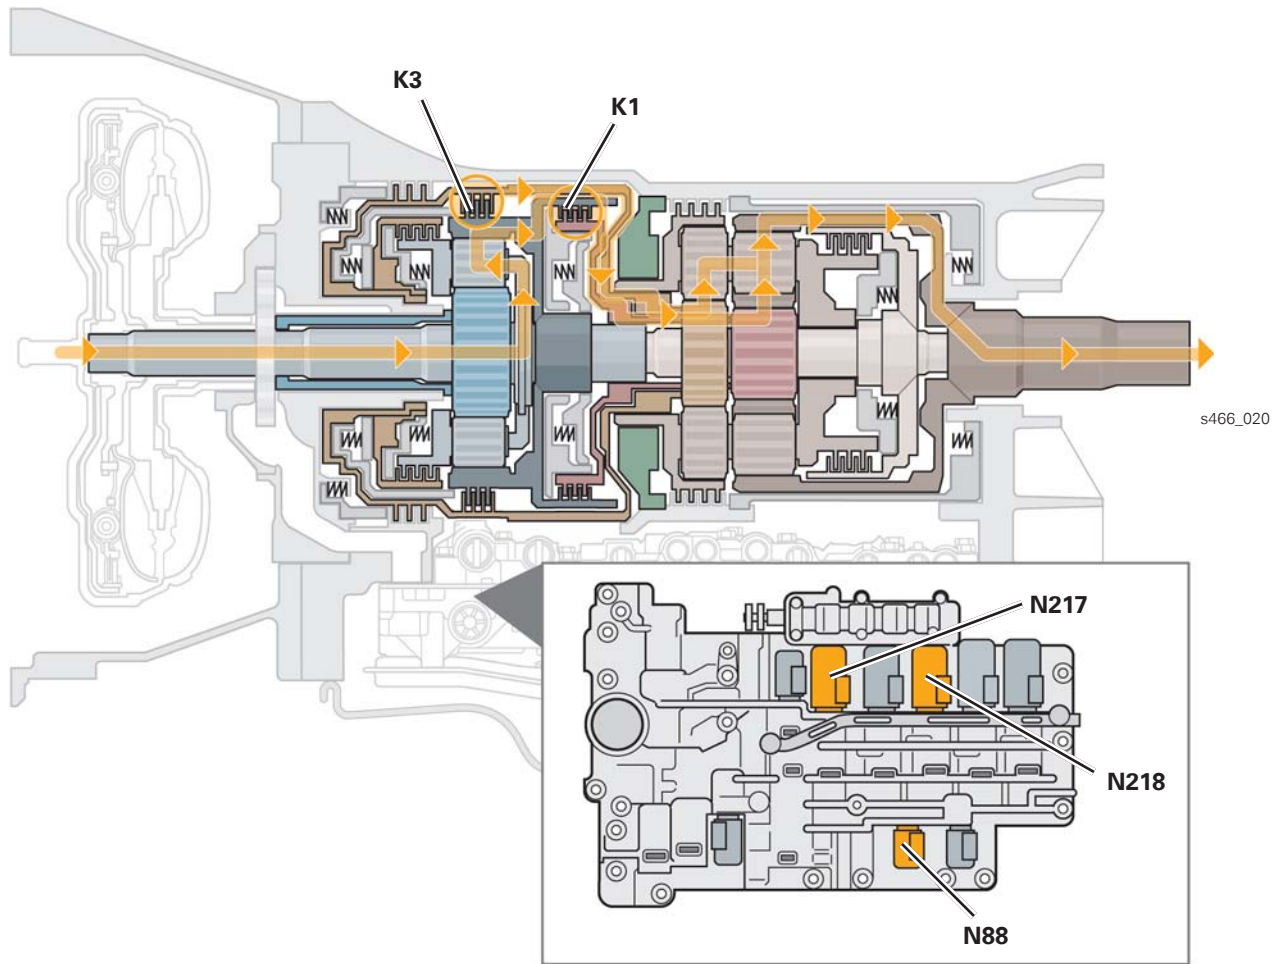

## K1 and K3 Clutches

The turbine shaft drives the single planetary gear set's planet carrier PT1. PT1 drives P1 planetary gears, which roll and are supported on stationary S1 sun gear. This causes the H1 annulus to be driven.

The K1 clutch connects the H1 to the S3 small sun gear, transferring torque into the double planetary gear set.


The K3 clutch connects the H1 to the S2 large sun gear, transferring torque into the double planetary gear set.

The planetary gears P2 and P3 are held by the K1 and K3. The PT2 planet carrier rotates along with S2 and S3. This causes the S2 and S3 to transfer torque to the H2 via PT2.



# Transmission Function

## 4th Gear

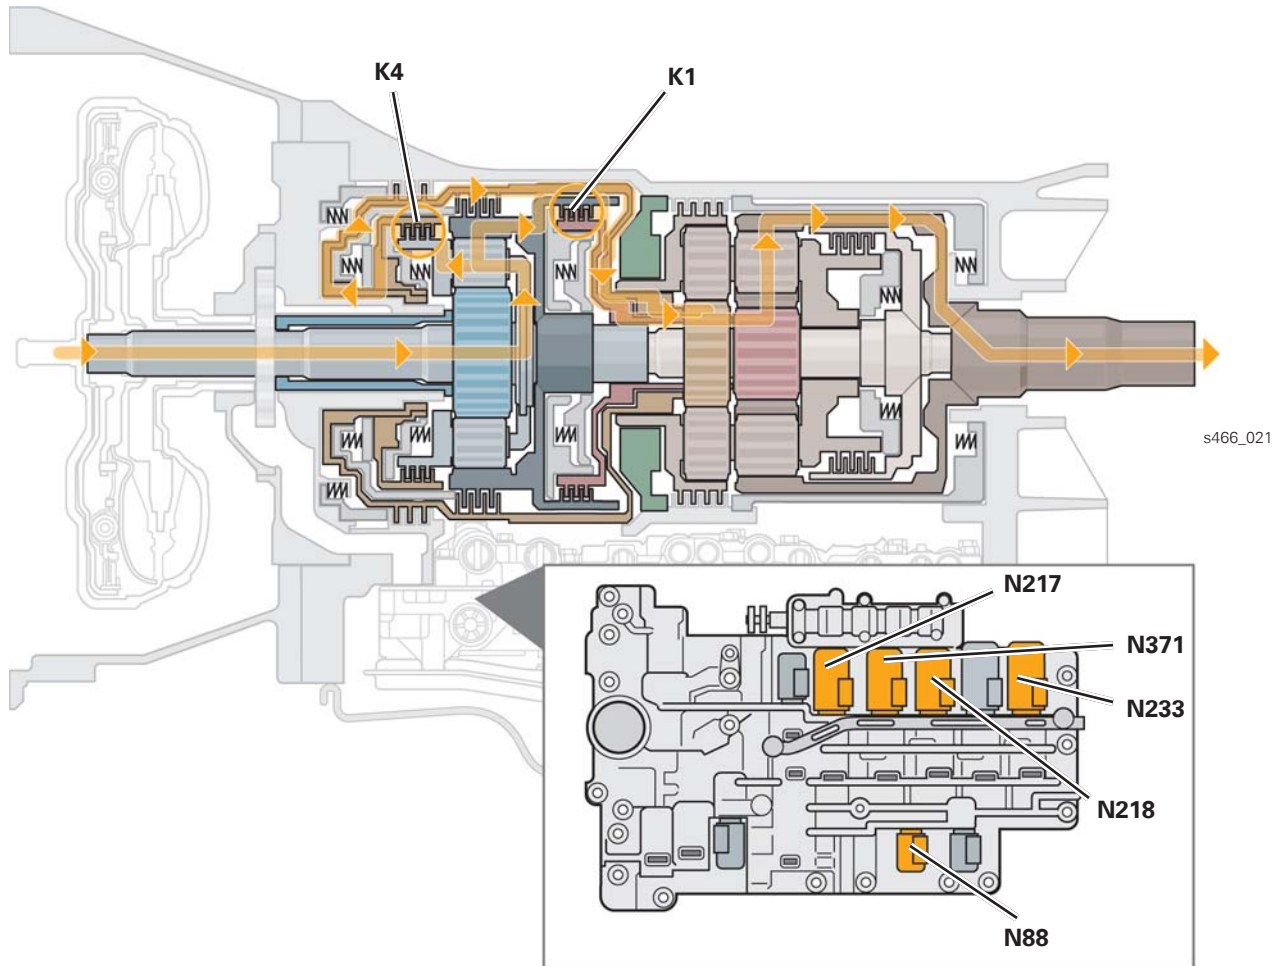

### K1 and K4 Clutches

The turbine shaft drives the PT1 single planetary gear set's planet carrier. PT1 drives P1 planetary gears, which roll and are supported on stationary S1 sun gear. This causes the H1 annulus to be driven.

The K1 clutch connects the H1 to the S3 sun gear, transferring torque into the double planetary gear set.

The K4 clutch connects PT1 to the S2 sun gear, transferring torque into the double planetary gear set.


The S3 is driven more slowly than S2.

Planetary gears P2 and P3 roll on S2, which is rotating faster, and drive the H2.



# Transmission Function

## 7th Gear

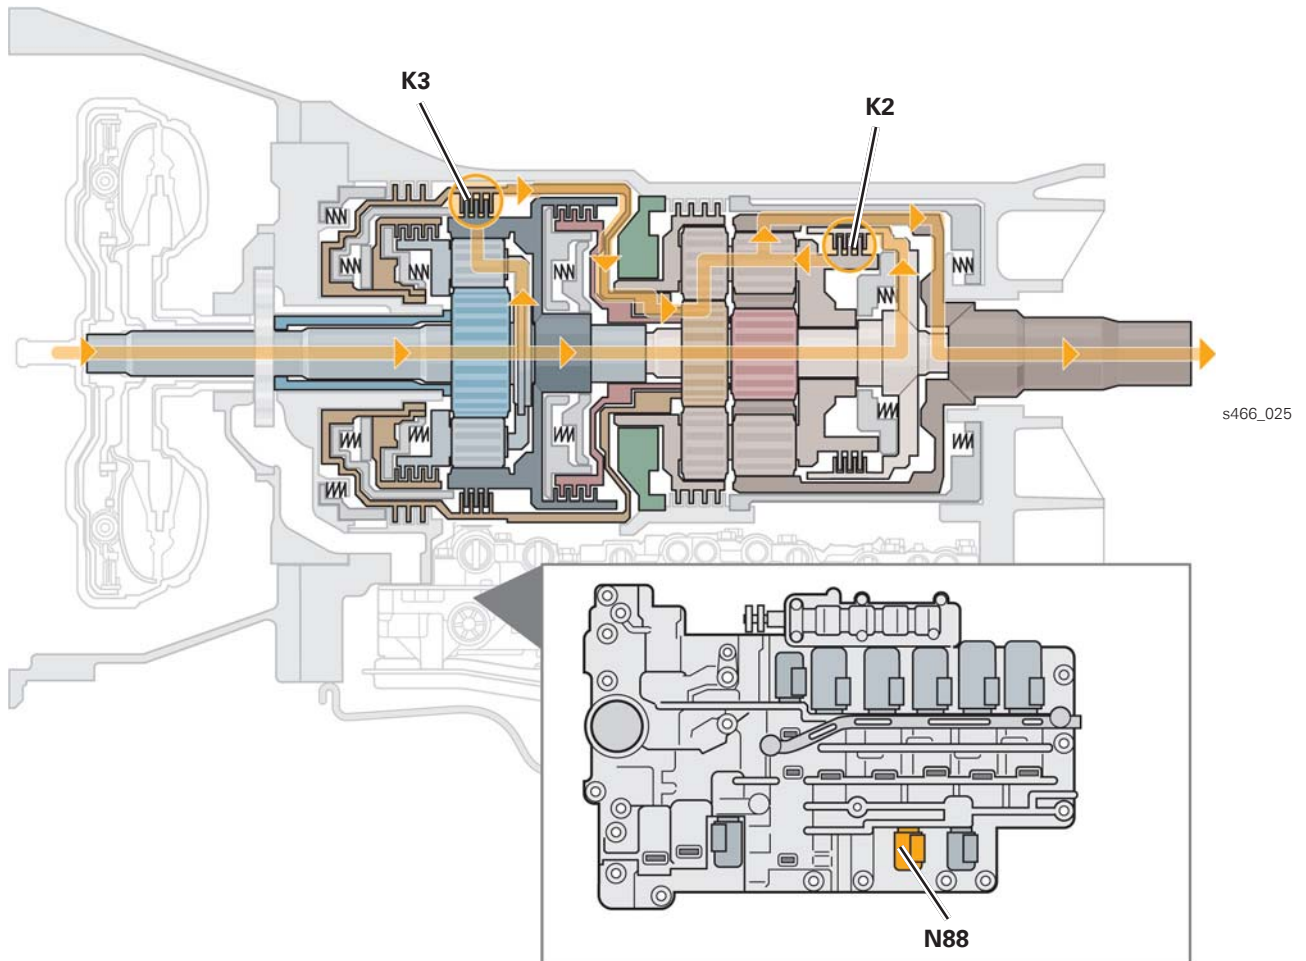

### K2 and K3 Clutches

The turbine shaft drives the PT1 single planetary gear set's planet carrier and K2 clutch's outer plate carrier.

The PT1 drives the P1 planetary gears, which roll and are supported on stationary S1 sun gear. This causes the H1 annulus to be driven.


The K3 clutch connects the H1 to the S2 sun gear, transferring torque into the double planetary gear set.

The K2 clutch connects the turbine shaft to PT2 planet carrier, transferring torque into the double planetary gear set.

The P2 planetary gears, which are jointly driven by the S2 and PT2, together with the firmly linked P3 outer planetary gears, drive the H2.

# Transmission Function

## 8th Gear

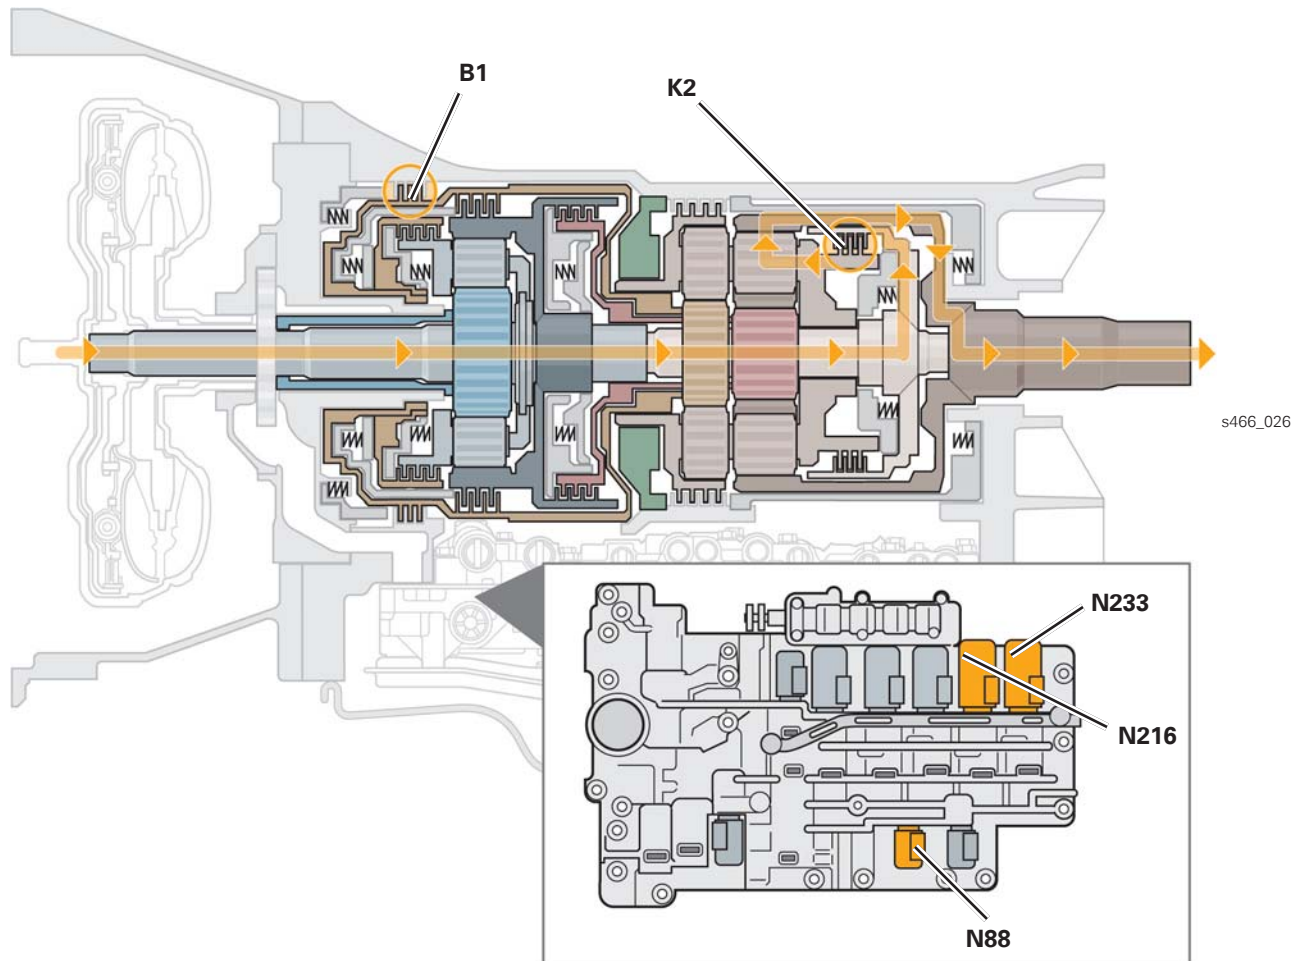


### K2 Clutch and B1 Brake

The B1 brake locks the S2 sun gear. The K2 clutch connects the turbine shaft to PT2 planet carrier of the double planetary gear set, transferring torque into the double planetary gear set. The long P2 planetary gears roll on stationary S2 and, together with the P3 outer planetary gears, drive the H2 annulus.

The K1 and K3 clutches are open. The single planetary gear set is not involved in power transmission.

# Transmission Function

## Reverse Gear

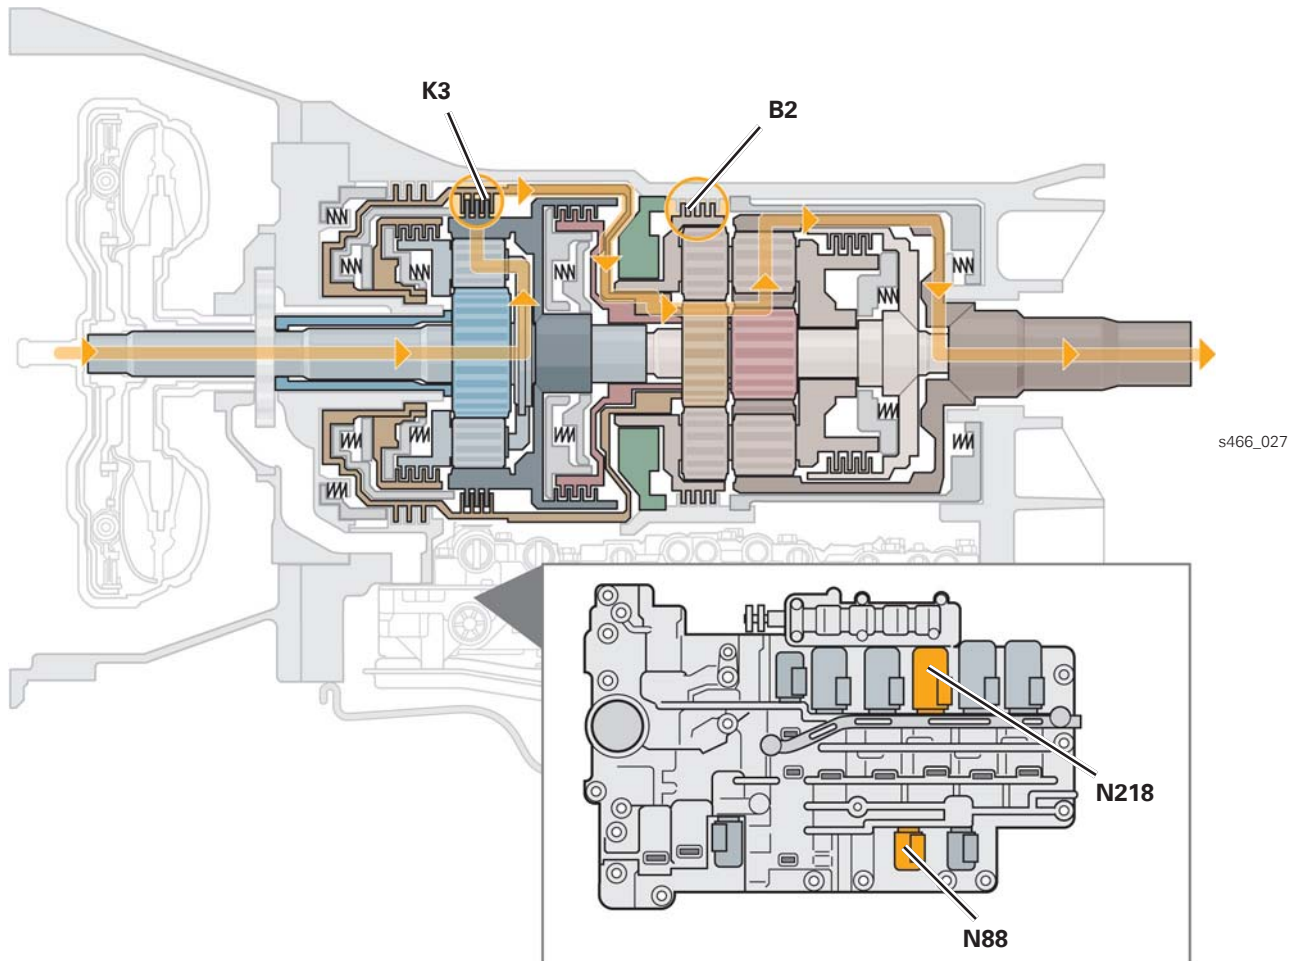

### K3 Clutch and B2 Brake

The turbine shaft drives the single planetary gear set's PT1 planet carrier. PT1 drives the P1 planetary gears, which roll and are supported on stationary S1 sun gear. The H1 annulus is driven

The K3 clutch connects the H1 to the S2 sun gear, transferring torque into the double planetary gear set. In the double planetary gear set, the B2 brake locks the PT2 planet carrier.

Torque is then transferred from the S2 to P2 planetary gears and then to the P3 outer planetary gears.

Supported by PT2, the torque is transferred to the H2, which is connected to the output shaft. The H2 is driven in the opposite direction of engine rotation.

# Transmission Function

## In Summary

The table shows which valves are actuated by the Transmission Control Module J217, and which clutches and brakes are closed as a result.

Gear	N217	N218	N233	N371	N216	N88	N89	K1	K2	K3	K4	B1	B2
1st	X	X	X			X		X					
1st tip.	X		X				X	X					X
2nd	X	X	X		X	X		X				X	
3rd	X	X						X		X			
4th	X	X	X	X		X		X			X		
5th	X		X			X		X	X				
6th			X	X		X			X		X		
7th						X			X	X			
8th			X		X	X			X			X	
R		X				X				X			X

- Pressure regulating valves with ascending characteristic curve
- Pressure regulating valves with descending characteristic curve
- Selector valves

N88 Solenoid Valve 1  
 N89 Solenoid Valve 2  
 N216 Automatic Transmission Pressure Regulating Valve 2  
 N217 Automatic Transmission Pressure Regulating Valve 3  
 N218 Automatic Transmission Pressure Regulating Valve 4  
 N233 Automatic Transmission Pressure Regulating Valve 5  
 N371 Automatic Transmission Pressure Regulating Valve 6

K1 to K4 - Clutches 1 to 4  
 B1, B2 - Brakes 1 and 2


---

**Page intentionally left blank**

# Transmission Management System


## System Overview

### Sensors

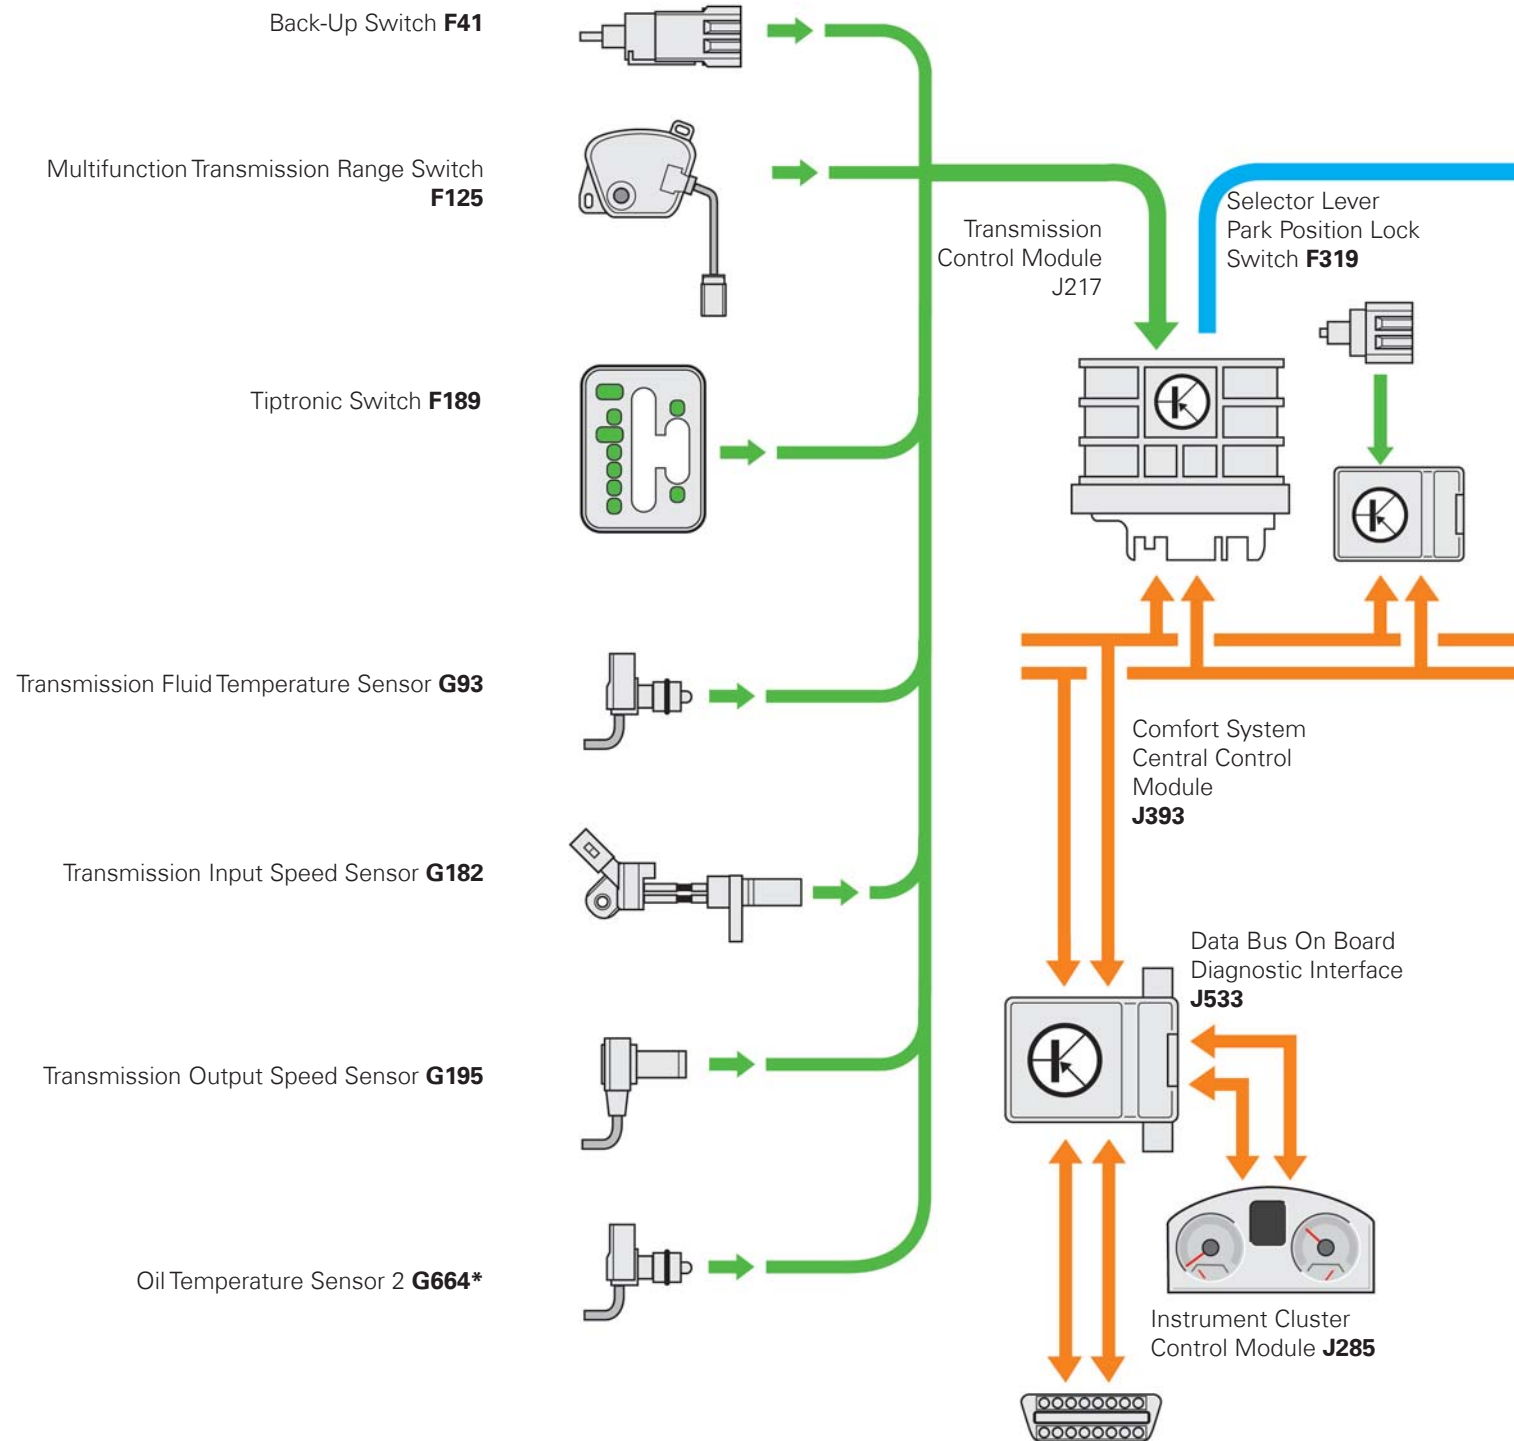



# Transmission Management System

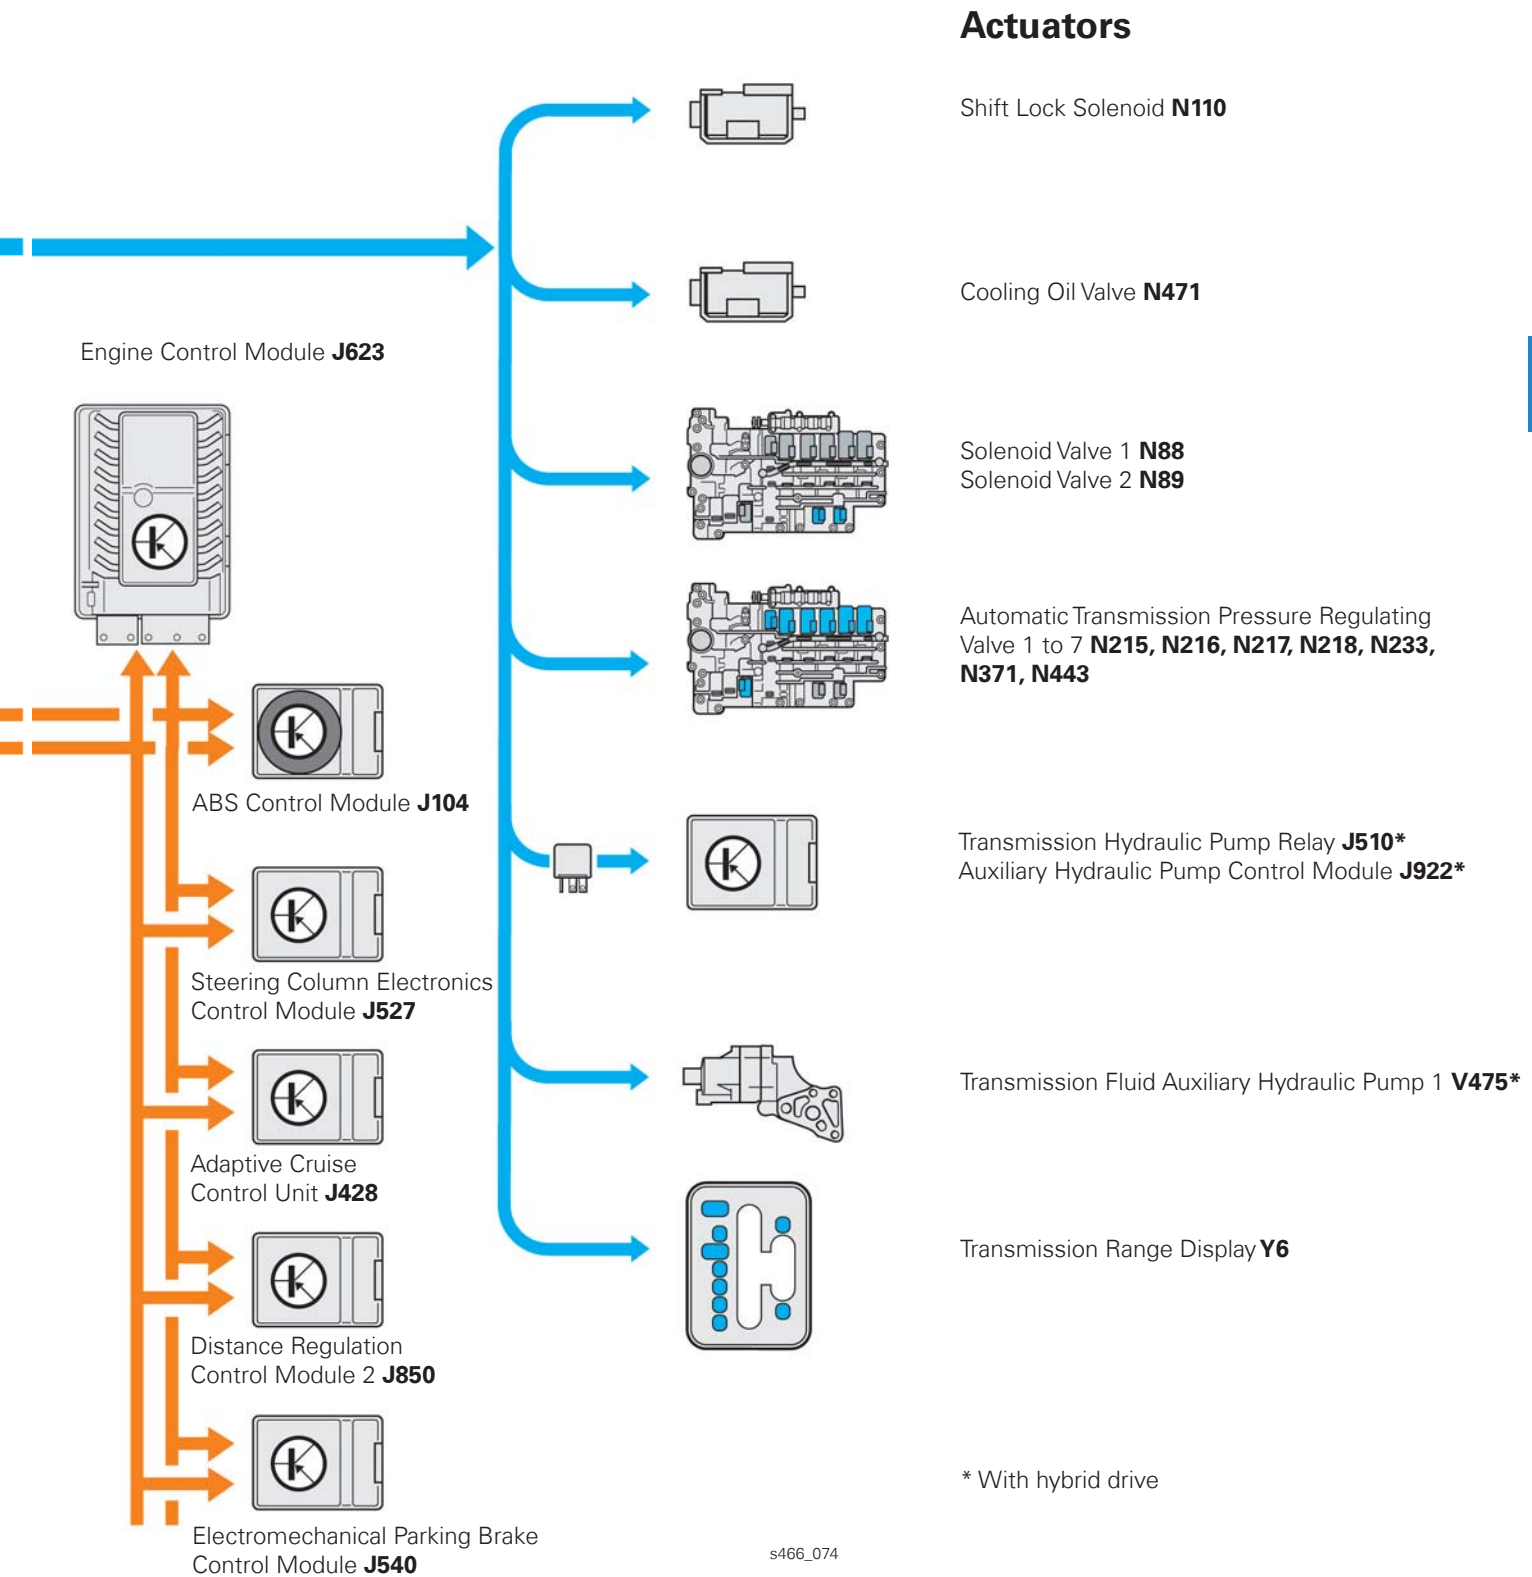

# Transmission Management System

---


## The Transmission Control Module J217

The Transmission Control Module J217 is located under the right front seat. It is connected to the gateway via the powertrain CAN - bus.

J217 receives information from the sensors inside of the transmission and actuates the solenoid valves in the valve body.

If equipped with the Transmission Fluid Auxiliary Hydraulic Pump 1 V475, the Oil Temperature Sensor 2 G664 transmits the operating temperature of the pump.

The dynamic shift program is also integrated into J217. It selects gear changes based on the operating status (aerodynamic drag and rolling resistance and driving style).

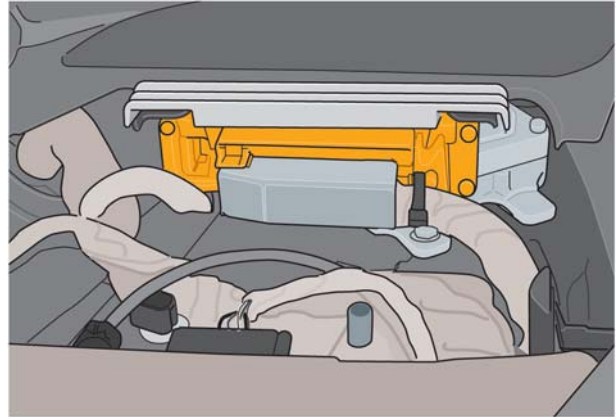


J217 under the right front seat

s466\_061

# Transmission Management System

---

## Auxiliary Hydraulic Pump Control Module

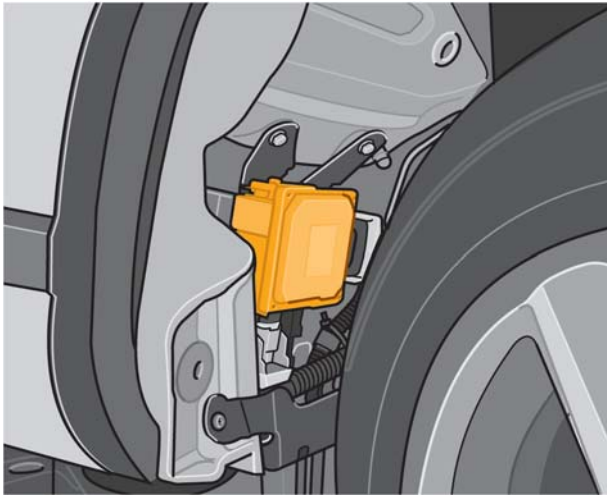

J922 in the right wheel housing


s466\_075

The Auxiliary Hydraulic Pump Control Module J922 is located in the right front wheel well for high ventilation. This pump has a high control rate due to the hybrid design.

J922 is controlled by the transmission control module and activates the Transmission Fluid Auxiliary Hydraulic Pump 1 V475 for providing transmission fluid pressure when the vehicle is stationary without the combustion engine running.


# Transmission Management System

## The Thermal Management System

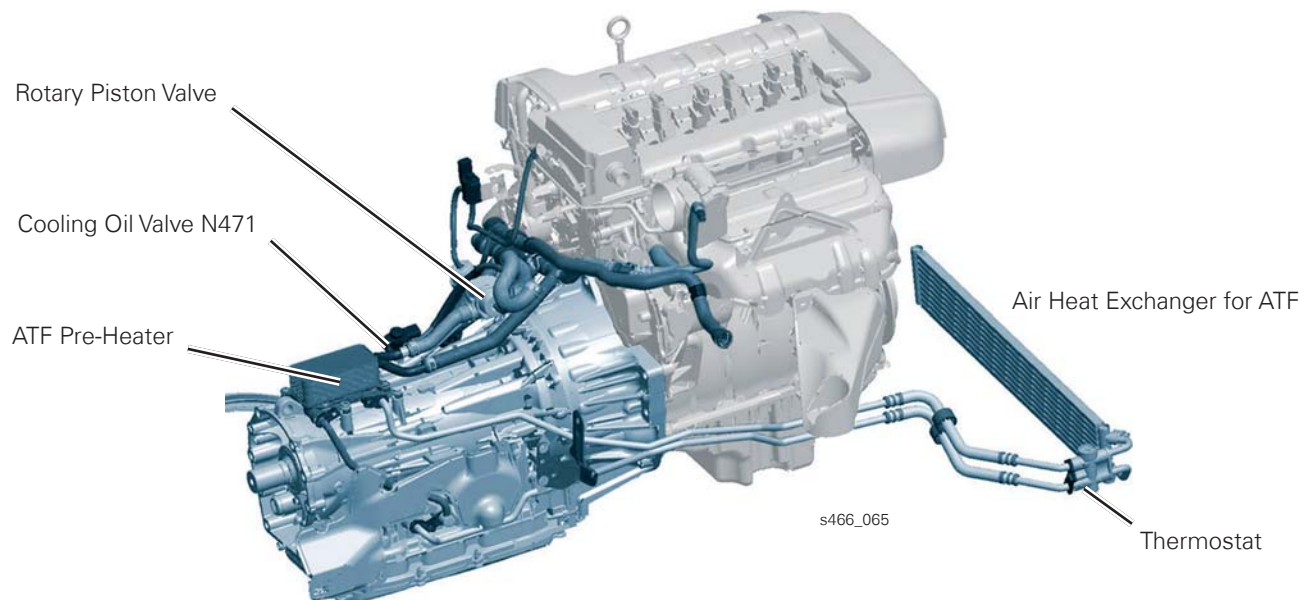

Once the combustion engine has reached its operating temperature, the coolant can be used to pre-heat the transmission fluid. The Transmission Control Module J217 receives information through the Powertrain CAN-Bus that the engine has reached its operating temperature and the transmission can be heated.



J217 supplies the Cooling Oil Valve N471 with current. As a result, the pneumatic cut-off valve (rotary piston valve) is opened by releasing vacuum, and the warm coolant flows through the ATF pre-heater mounted on the transmission. The ATF pre-heater consists of a set of plates joined together to form a heat exchanger between coolant and ATF.



More information on the thermal management system can be found in SSP 890203, The Touareg Hybrid.

# Transmission Management System

## The Hill-Holder Function

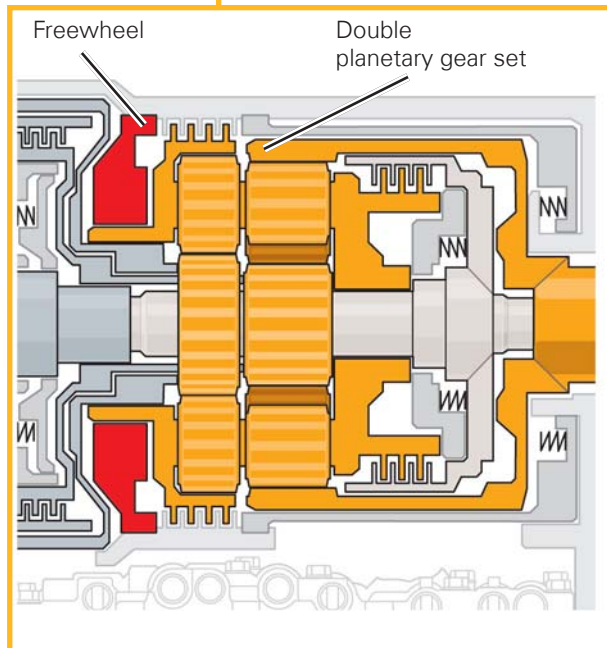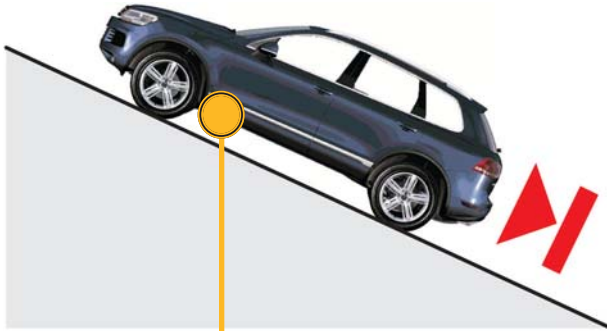

s466\_077

This secures the vehicle to prevent it from rolling back on an incline, enabling comfortable start off on slopes.

The hill-holder function is controlled by the electronic parking brake via the ABS control unit at an ATF temperature of less than approx. 10°C (50°F).

At temperatures above 10°C, the function is performed by the transmission. If the Transmission Control Module J217 detects a slope based on the rolling resistance, while simultaneously detecting a vehicle speed of 0 mph, it shifts to 2nd gear.

Rolling back is not possible in 2nd gear, because the locking freewheel will not allow the double planetary gear set's annulus to rotate backwards.

The freewheel is only released when the starting torque is greater than the resistance of the grade, allowing the vehicle to move off comfortably.

# Electrical Components

## The Selector Lever Module



Gear changes are actuated using the selector lever module. This module is equipped with both a mechanical connection to the automatic transmission via a Bowden cable and an electrical connection to the transmission management system.

### Bowden cable connection functions

- Parking lock actuation
- Actuation of the hydraulic control system's mechanically operated spool valve
- Actuation of the multifunction switch on the transmission

### Electrical functions

- Ignition key withdrawal lock
- Actuation of the selector lever position display unit (via the transmission control unit)
- Tiptronic function
- Selector lever lock (P/N lock)





# Electrical Components

## The Gear Change Mechanism

The design and function of the gear change mechanism in the Touareg is adapted from the Audi Q7.

The gear change mechanism and the selector housing cannot be separated.

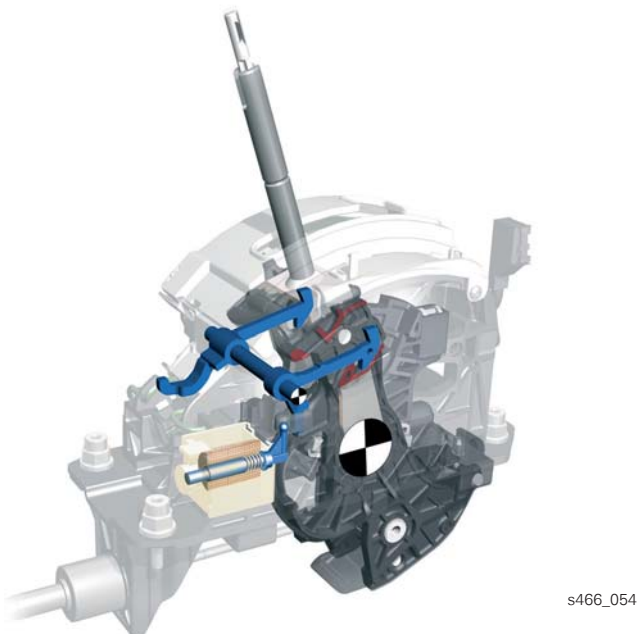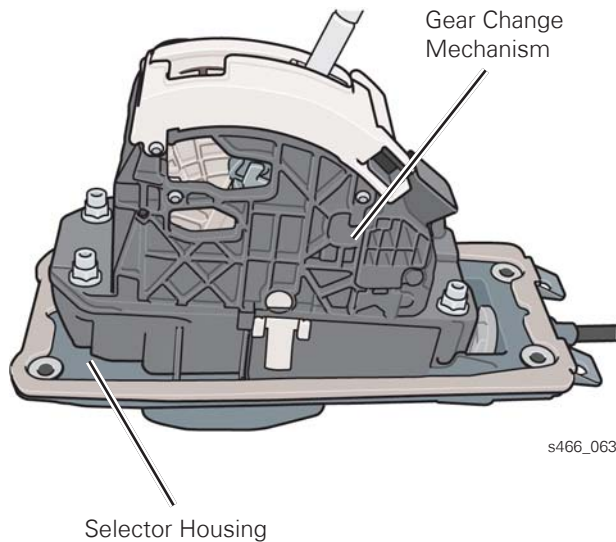

### Selector lever locks (P lock and P/N lock)

The selector lever lock is actuated when the ignition is switched ON and in the P and N positions during vehicle operation. When the ignition key is removed, the system is locked in the P position.

The locking mechanism enables the selector lever to be locked both when no current is supplied to the Shift Lock Solenoid N110 (P position) and when current is supplied (N position).


# Electrical Components

## Lock in Selector Lever Position P

The selector lever locks in the P position because the locking lever automatically locks in this position.

If no current is supplied to Shift Lock Solenoid N110, the locking lever automatically drops into the P catch as soon as the selector lever is brought to the P position. This locking lever movement is engaged by a spring in the N110.


The N110 is supplied with current for unlocking purposes. As a result, the solenoid pushes the locking lever out of the P catch. In the event of a defect or a current failure, the selector lever remains locked. This can be released using the emergency release.

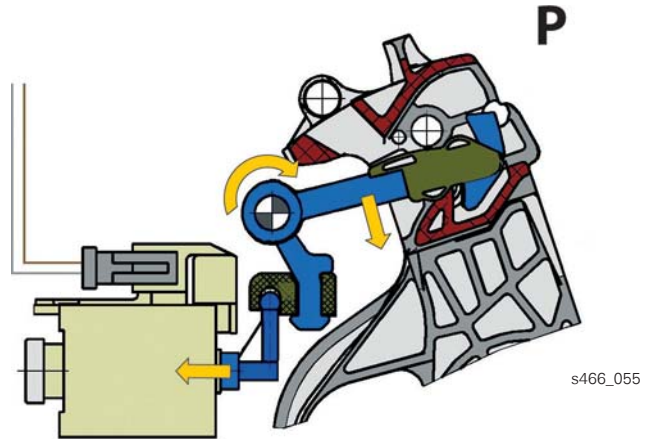


## Lock in Selector Lever Position N

If the selector lever is in the N position, the N110 is actuated. This presses the locking lever into the N catch with its upper hook and locks the selector lever.


In order to release the lock, the N110 is shut off and the locking lever drops down out of the catch.

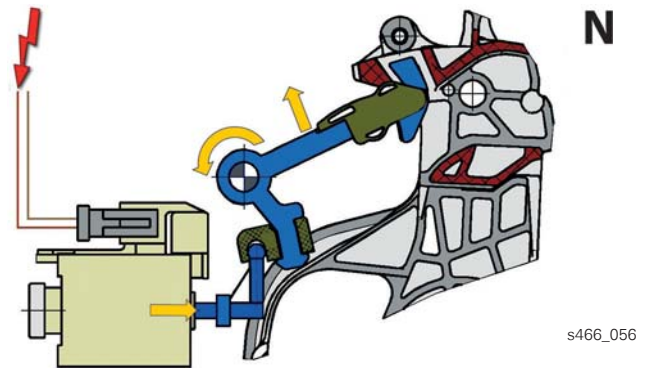

# Electrical Components

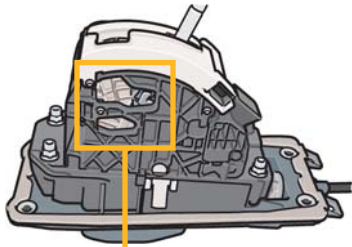

s466\_063

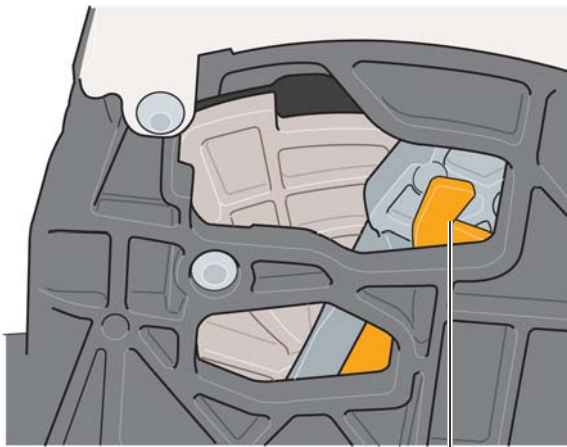

Locking Lever for Emergency Release

s466\_064

## Parking Lock Emergency Release

In order to actuate the selector lever lock's emergency release mechanism, the selector lever trim cover must be removed from the center console.

The emergency release mechanism's locking lever is located on the right-hand side of the gear change mechanism. To release the selector lever lock, the locking lever must be pulled up while simultaneously pressing the selector lever lock button.



Secure the vehicle to prevent it from rolling before the selector lever is moved to the N position.




s466\_059

## Transmission Range Display Y6

The selector lever position information comes directly from the transmission control unit as a frequency modulated rectangular signal (FMR signal).

The selector lever sensor system evaluates the signal and actuates the corresponding light-emitting diode in the Transmission Range Display Y6.


# Functional Diagram

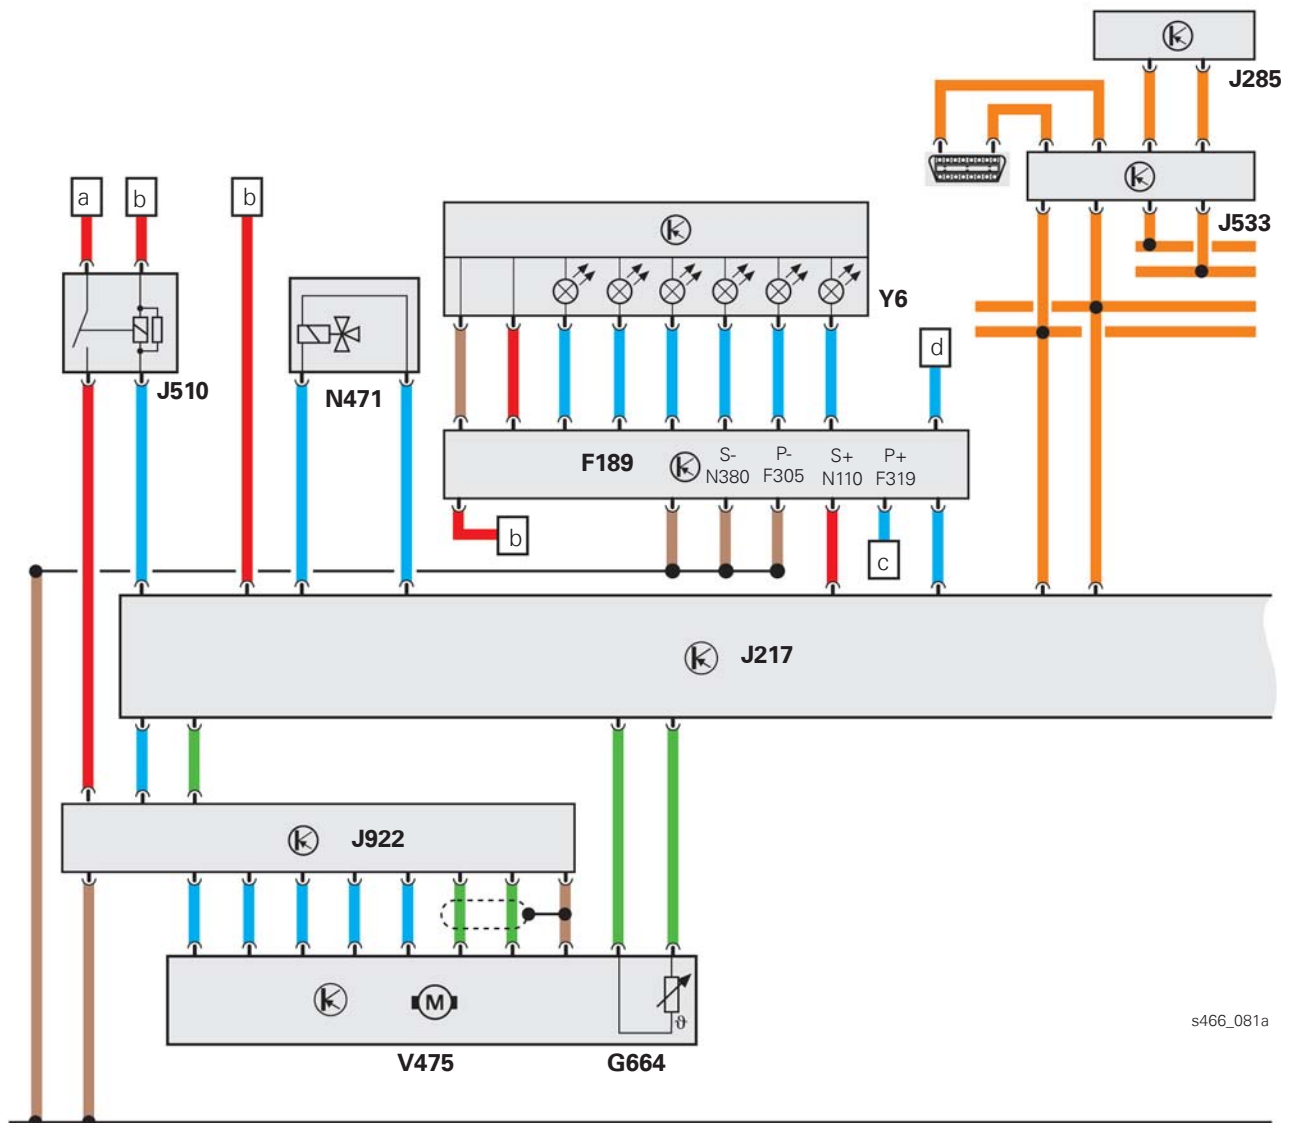

s466\_081a

F189	Tiptronic Switch	V475	Transmission Fluid Auxiliary Hydraulic Pump 1
F305	Transmission Park Selector Switch	Y6	Transmission Range Display
F319	Selector Lever Park Position Lock Switch		
G664	Oil Temperature Sensor 2		
J217	Transmission Control Module	a	Fuse Holder D
J285	Instrument Cluster Control Module	b	Fuse Holder C
J510	Transmission Hydraulic Pump Relay	c	Connection to the Convenience System Central Control Module
J533	Data Bus On Board Diagnostic Interface	d	Connection to the Onboard Power Supply Control Module
J922	Auxiliary Hydraulic Pump Control Module	e	Connection to the Convenience System Central Control Module
N110	Shift Lock Solenoid		
N380	Selector Lever Park Position Solenoid		
N471	Cooling Oil Valve		

# Functional Diagram

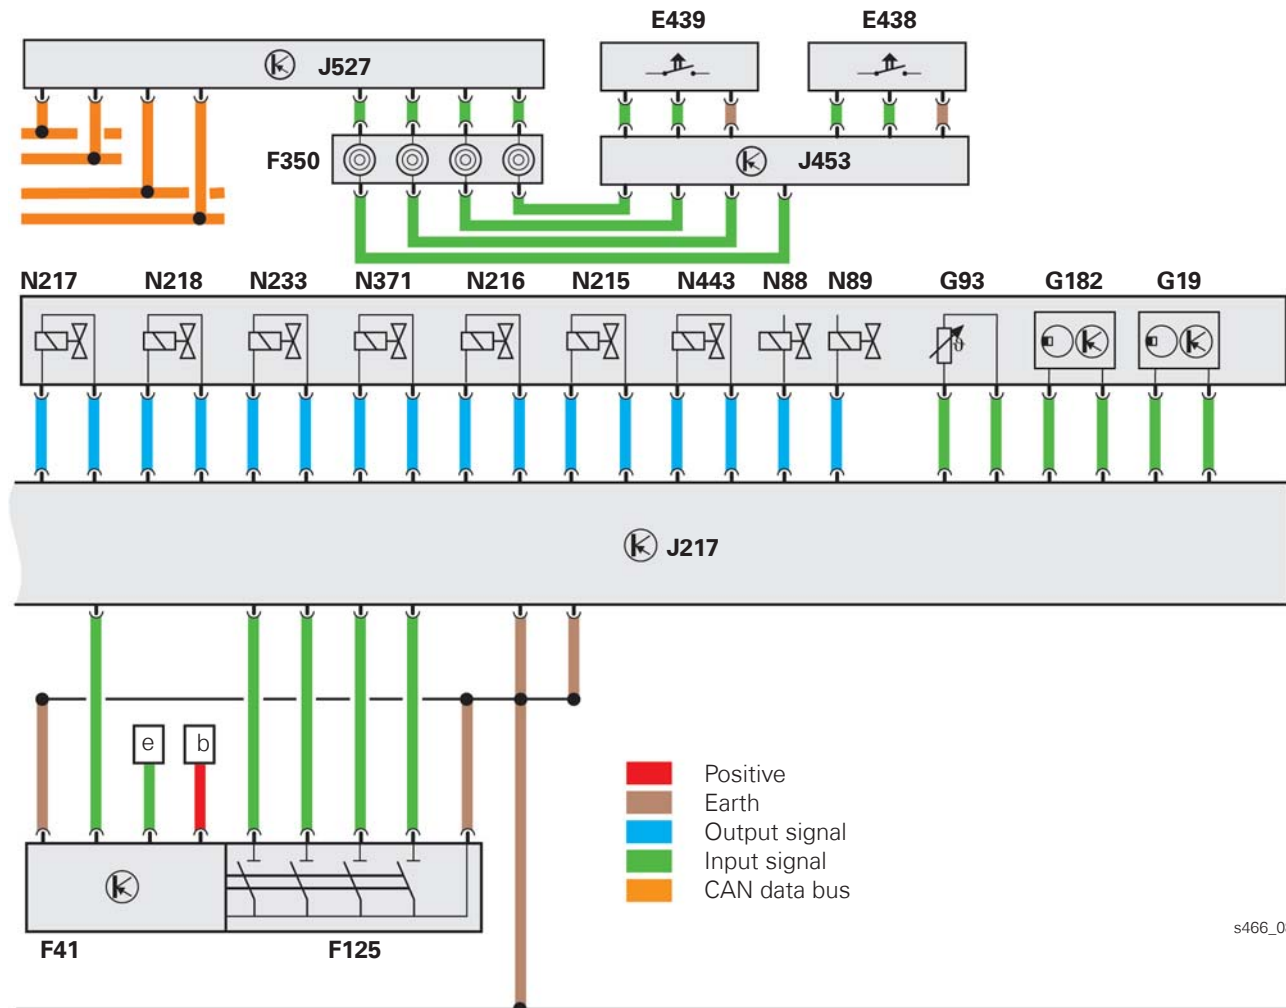

s466\_081b

E438 Tiptronic Upshift Button on Steering Wheel  
 E439 Tiptronic Downshift Button on Steering Wheel  
 F41 Back-up Switch  
 F125 Multifunction Transmission Range Switch  
 F350 Spiral Spring  
 G93 Transmission Oil Temperature Sender  
 G182 Transmission Input Speed Sensor  
 G195 Transmission Output Speed Sensor  
 J453 Multifunction Steering Wheel Control Module  
 J527 Steering Column Electronics Control Module

N88 Solenoid Valve 1  
 N89 Solenoid Valve 2  
 N215 Automatic Transmission Pressure Regulating Valve 1  
 N216 Automatic Transmission Pressure Regulating Valve 2  
 N217 Automatic Transmission Pressure Regulating Valve 3  
 N218 Automatic Transmission Pressure Regulating Valve 4  
 N233 Automatic Transmission Pressure Regulating Valve 5  
 N371 Automatic Transmission Pressure Regulating Valve 6  
 N443 Automatic Transmission Pressure Regulating Valve 7

---

**Page intentionally left blank**



# Knowledge Assessment

---

An on-line Knowledge Assessment (exam) is available for this Self-Study Program.

The Knowledge Assessment may or may not be required for Certification.

You can find this Knowledge Assessment at:

**[www.vwwebservice.com](http://www.vwwebservice.com)**

For Assistance, please call:

**Volkswagen Academy**


**Certification Program Headquarters**

**1-877-791-4838**

**(8:00 a.m. to 8:00 p.m. EST)**

Or, E-Mail:

**[concierge@volkswagenacademy.com](mailto:concierge@volkswagenacademy.com)**

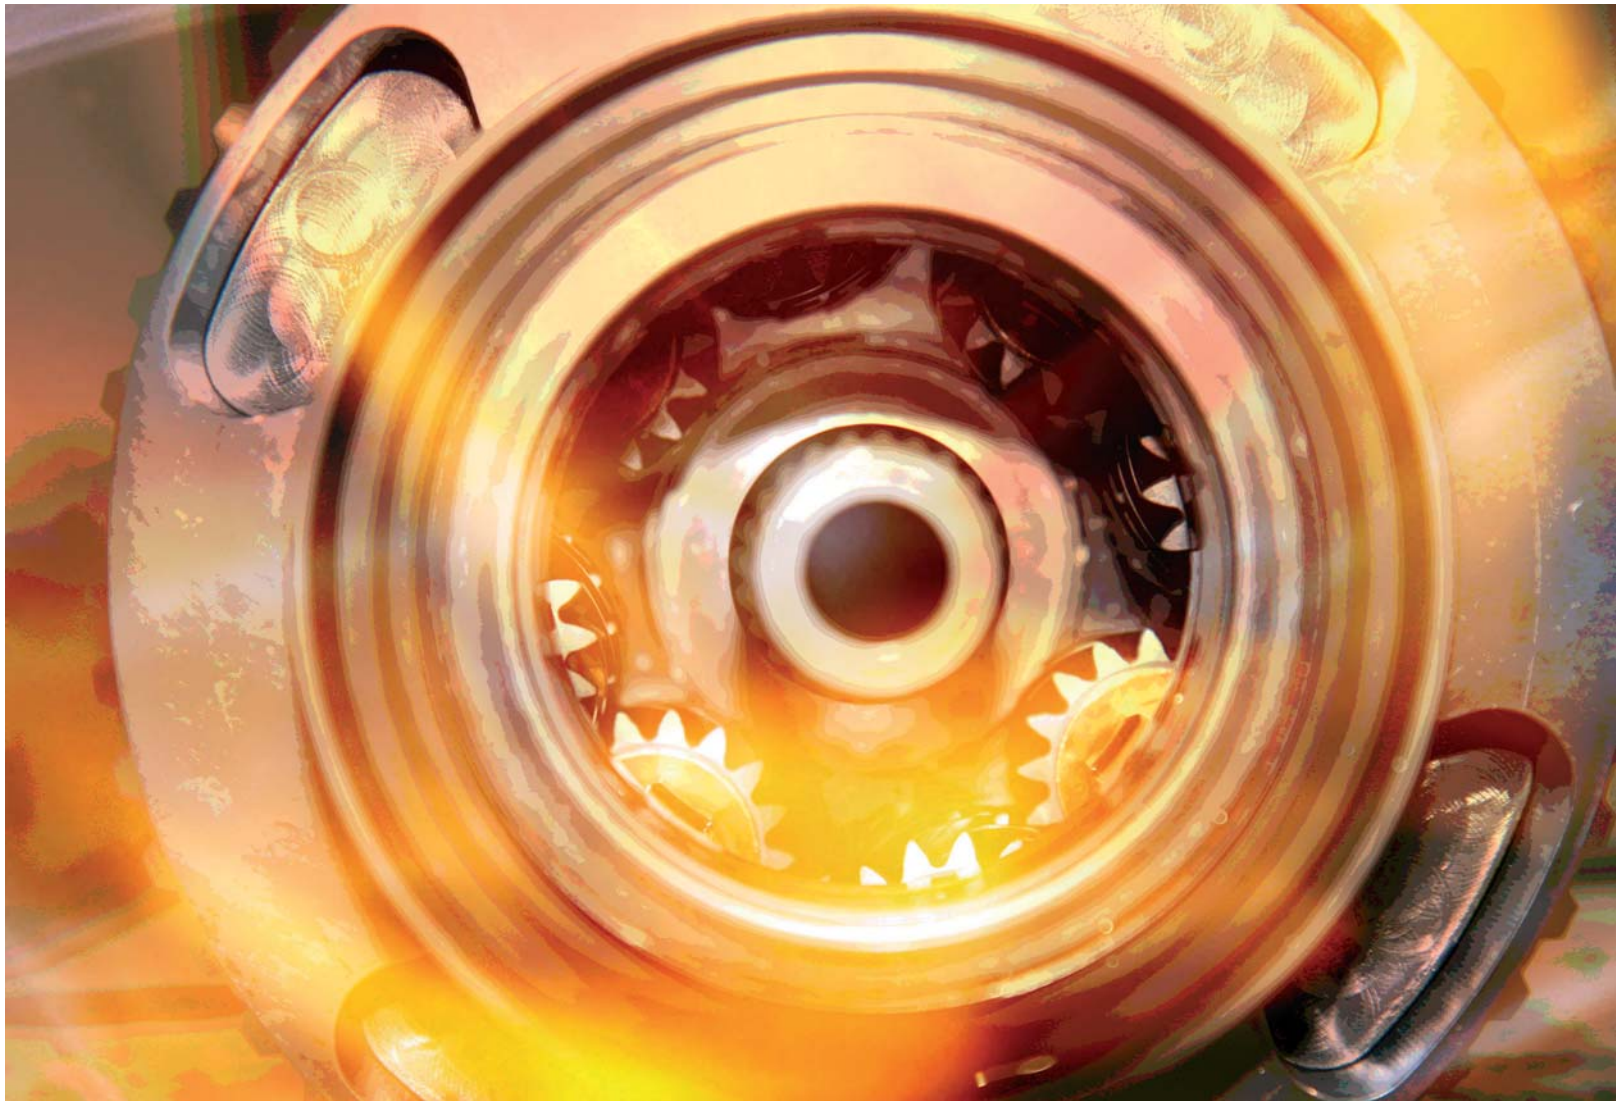

Volkswagen Group of America  
2200 Ferdinand Porsche Drive  
Herndon, VA 20171  
August, 2010

